


ROAD

SUPERSIX EVO


SPECIFICATIONS	48	50	52	54	56	58	60	63
A HORIZONTAL TOP TUBE LENGTH (CM)	51.0	52.0	53.5	54.5	56.0	57.5	59.0	60.0
B MEASURED SIZE (CM)*	46.0	48.0	50.0	52.0	54.0	56.0	58.0	61.0
C SEAT TUBE ANGLE	74.5°	74.5°	74.0°	73.5°	73.5°	73.0°	72.5°	72.0°
D HEAD TUBE ANGLE	71.5°	72.0°	72.5°	73.0°	★	73.5	★	★
E CHAINSTAY LENGTH (CM)	40.5	★	★	★	★	★	40.8	★
F FORK RAKE (CM)	4.5	★	★	★	★	★	★	★
G BOTTOM BRACKET HEIGHT (CM)	26.5	★	★	26.8	★	27.0	★	★
H WHEELBASE (CM)	96.2	96.7	97.3	97.5	99.0	99.6	100.8	101.1
I TRAIL (CM)	6.5	6.2	5.9	5.6	5.6	5.3	★	★
J STANDOVER AT TOP TUBE MIDPOINT (CM)	74.2	75.5	76.7	78.8	80.4	82.5	84.3	86.9
K BOTTOM BRACKET DROP (CM)	7.2	★	★	6.9	★	6.7	★	★
L FRONT CENTER DISTANCE (CM)	56.3	56.9	57.5	57.6	59.1	59.7	60.6	60.9
M HEAD TUBE LENGTH (CM)	11.0	11.5	12.0	14.0	15.5	17.5	19.5	22.0
N STACK (CM)	51.3	51.9	52.6	54.4	55.8	57.7	59.6	62.0
O REACH (CM)	36.8	37.6	38.4	38.4	39.5	39.9	40.2	39.9

* THE MEASURED SIZE IS FROM THE CENTER OF THE BOTTOM BRACKET TO THE TOP OF THE TOP TUBE, MEASURED ALONG THE SEAT TUBE AXIS.

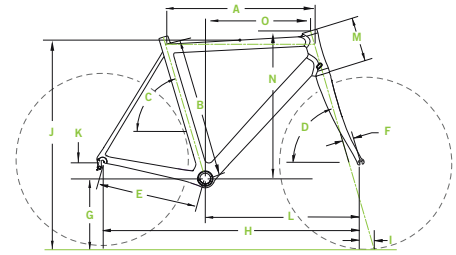


CAAD10

SPECIFICATIONS	48	50	52	54	56	58	60	63
A HORIZONTAL TOP TUBE LENGTH (CM)	51.5	52.5	53.5	54.5	56.0	57.5	59.0	60.0
B MEASURED SIZE (CM)*	46.0	48.0	50.0	52.0	54.0	56.0	58.0	61.0
C SEAT TUBE ANGLE	74.5°	★	74.0°	73.5°	★	73.0°	72.5°	72.0°
D HEAD TUBE ANGLE 26.5	72.0°	72.5°	73.0°	★	★	73.5°	★	★
E CHAINSTAY LENGTH (CM)	40.5	★	40.8	★	★	★	★	★
F FORK RAKE (CM)	5.0	★	★	★	4.5	★	★	★
G BOTTOM BRACKET HEIGHT (CM)	26.5	★	★	26.8	★	27.0	★	★
H WHEELBASE (CM)	96.5	97.2	97.7	97.8	99.3	99.9	100.1	101.3
I TRAIL (CM)	6.2	5.9	5.6	★	★	5.3	★	★
J STANDOVER AT TOP TUBE MIDPOINT (CM)	74.0	75.3	76.5	78.5	80.1	82.2	83.8	86.6
K BOTTOM BRACKET DROP (CM)	7.2	★	★	6.9	★	6.7	★	★
L FRONT CENTER DISTANCE (CM)	57.0	57.7	57.9	58.0	59.7	60.1	61.0	61.4
M HEAD TUBE LENGTH (CM)	11.0	11.5	12.0	14.0	15.5	17.5	19.0	22.0
N STACK (CM)	51.7	52.3	52.9	54.6	56.0	57.9	59.3	62.2
O REACH (CM)	36.8	37.8	38.2	38.3	39.4	39.9	40.4	39.9

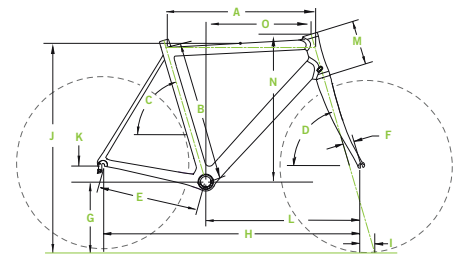

CAAD8

SPECIFICATIONS	48	51	54	56	58	61
A HORIZONTAL TOP TUBE LENGTH (CM)	51.0	53.0	54.5	56.0	57.5	59.5
B MEASURED SIZE (CM)*	46.0	49.0	52.0	54.0	56.0	59.0
C SEAT TUBE ANGLE	75.0°	74.5°	73.5°	★	73.0°	72.5°
D HEAD TUBE ANGLE	72.0°	72.5°	73.0°	★	73.5°	★
E CHAINSTAY LENGTH (CM)	40.8	★	★	★	★	★
F FORK RAKE (CM)	5.0	★	4.5	★	★	★
G BOTTOM BRACKET HEIGHT (CM)	26.5	★	26.8	★	27.0	★
H WHEELBASE (CM)	96.6	97.9	97.8	99.3	100.0	101.4
I TRAIL (CM)	5.6	5.3	5.5	★	5.2	★
J STANDOVER AT TOP TUBE MIDPOINT (CM)	74.4	76.6	78.9	80.6	82.6	85.4
K BOTTOM BRACKET DROP (CM)	7.2	★	6.9	★	6.7	★
L FRONT CENTER DISTANCE (CM)	56.4	57.8	57.6	59.1	59.7	61.1
M HEAD TUBE LENGTH (CM)	12.5	14.0	15.5	17.0	19.0	22.0
N STACK (CM)	52.8	54.4	55.8	57.3	59.2	62.0
O REACH (CM)	36.4	37.7	37.9	39.0	39.5	40.1

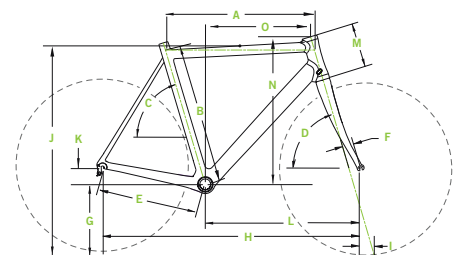


ROAD

SYNAPSE HI-MOD / CARBON

SPECIFICATIONS	48	51	54	56	58	61
A HORIZONTAL TOP TUBE LENGTH (CM)	50.8	52.4	54.2	56.1	58.1	60.1
B MEASURED SIZE (CM)*	43.0	46.0	49.0	51.0	54.0	57.5
C SEAT TUBE ANGLE	74.6°	74.3°	73.9°	73.5°	73.0°	72.5°
D HEAD TUBE ANGLE	70.8°	71.3°	72.0°	72.5°	73.0°	★
E CHAINSTAY LENGTH (CM)	41.0	★	★	★	41.3	★
F FORK RAKE (CM)	5.0	★	4.5	★	★	★
G BOTTOM BRACKET HEIGHT (CM)	26.5	★	26.8	★	27.0	★
H WHEELBASE (CM)	97.6	98.6	99.0	100.0	101.3	102.8
I TRAIL (CM)	6.5	6.2	6.3	6.0	5.7	★
J STANDOVER AT TOP TUBE MIDPOINT (CM)	69.5	72.5	75.8	77.8	81.0	84.5
K BOTTOM BRACKET DROP (CM)	7.5	★	7.3	★	7.0	★
L FRONT CENTER DISTANCE (CM)	57.8	58.8	59.1	60.1	61.0	62.5
M HEAD TUBE LENGTH (CM)	12.7	14.6	16.6	18.6	20.8	22.9
N STACK (CM)	52.8	54.9	57.0	59.0	61.1	63.1
O REACH (CM)	36.2	37.0	37.8	38.6	39.4	40.2

SYNAPSE DISC ALLOY / SYNAPSE ALLOY

SPECIFICATIONS	48	51	54	56	58	61
A HORIZONTAL TOP TUBE LENGTH (CM)	50.8	52.4	54.2	56.1	58.1	60.1
B MEASURED SIZE (CM)*	43.0	46.0	49.0	52.0	54.5	57.5
C SEAT TUBE ANGLE	74.6°	74.3°	73.9°	73.5°	73.0°	72.5°
D HEAD TUBE ANGLE	70.8°	71.3°	72.0°	72.5°	73.0°	★
E CHAINSTAY LENGTH (CM)	41.0	★	★	★	★	★
F FORK RAKE (CM)	5.0	★	★	★	★	★
G BOTTOM BRACKET HEIGHT (CM)	26.5	★	26.8	★	27.0	★
H WHEELBASE (CM)	97.7	98.7	99.6	100.5	101.5	103.0
I TRAIL (CM)	6.5	6.2	5.8	5.5	5.2	★
J STANDOVER AT TOP TUBE MIDPOINT (CM)	71.8	74.5	77.4	80.5	82.7	85.7
K BOTTOM BRACKET DROP (CM)	7.5	★	7.3	★	7.0	★
L FRONT CENTER DISTANCE (CM)	57.8	58.8	59.7	60.6	61.5	63.0
M HEAD TUBE LENGTH (CM)	12.7	14.6	16.6	18.6	20.8	23.0
N STACK (CM)	53.7	55.7	57.6	59.7	61.8	63.9
O REACH (CM)	36.0	36.8	37.6	38.4	39.2	40.0

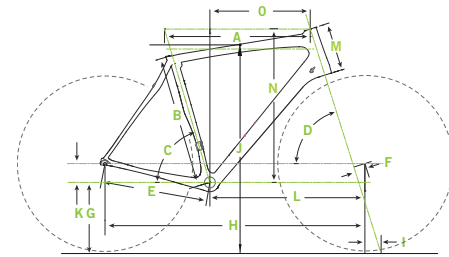

SLICE RS


SPECIFICATIONS	50	52	54	56	58
A HORIZONTAL TOP TUBE LENGTH (CM)	50.4	51.9	53.4	54.9	56.4
B MEASURED SEAT TUBE LENGTH (CM)	50.0	51.0	53.0	55.0	57.0
C SEAT TUBE ANGLE*	*VARIABLE	★	★	★	★
D HEAD TUBE ANGLE	71.5°	★	★	★	★
E CHAIN STAY LENGTH (CM)	40.5	★	★	★	★
F FORK RAKE (CM/IN)	4.5	★	★	★	★
G BOTTOM BRACKET HEIGHT (CM)	26.5	★	★	★	★
H WHEELBASE (CM)	96.2	97.8	99.4	101.0	102.7
I TRAIL (CM)	6.5	★	★	★	★
J STANDOVER AT TOP TUBE MIDPOINT (CM)	76.5	77.5	79.5	81.5	83.5
K BOTTOM BRACKET DROP (CM)	7.2	★	★	★	★
L FRONT CENTER (CM)	56.5	58.0	59.7	61.3	62.9
M HEAD TUBE LENGTH (CM)	7.0	8.0	10.2	12.3	14.4
N STACK (CM)	50.0	51.0	53.0	55.0	57.0
O REACH (CM)	36.9	38.2	39.2	40.1	41.1
P PAD STACK LOWEST (CM)**	53.5	54.5	56.5	58.5	60.5
Q PAD STACK HIGHEST (CM)**	60.5	61.5	63.5	65.5	67.5
R PAD REACH SHORTEST (CM)**	44.1	45.4	46.4	47.3	48.3
S PAD REACH LONGEST (CM)**	48.1	49.4	50.4	51.3	52.3

* THE SLICE RS SEAT POST IS REVERSIBLE. A FULL RANGE OF ANGLES FROM 74 TO 79 DEGREES IS ACHIEVABLE DEPENDING ON THE RIDER'S PREFERENCE AND/OR THE EVENT.
 **PAD STACK AND REACH ARE MEASURED TO THE CENTER OF THE PAD.
 SUBTRACT 4.0MM FOR REAR OF PAD.
 FSA AERO EXTENSIONS AND ARM RESTS.

SLICE

SPECIFICATIONS	44	48	51	54	57	60
A HORIZONTAL TOP TUBE LENGTH (CM)	45.0	47.0	48.9	50.7	52.6	54.5
B MEASURED SEAT TUBE LENGTH (CM)	46	48.6	50.3	52.4	54.4	56.5
C SEAT TUBE ANGLE*	79°	★	★	★	★	★
D HEAD TUBE ANGLE	71.2°	★	★	71.5°	72°	72.5°
E CHAINSTAY LENGTH (CM)	38.0	40.5	★	★	★	★
F FORK RAKE (CM/IN)	3.5	4.5	★	★	★	★
G BOTTOM BRACKET HEIGHT (CM)	25.9	26.2	★	★	★	★
H WHEELBASE (CM)	91.3	96.0	98.1	100.0	101.7	103.4
I TRAIL (CM)	6.9	6.8	6.8	6.6	6.3	6.0
J STANDOVER AT TOP TUBE MIDPOINT (CM)	71.1	73.9	75.6	77.7	79.7	81.7
K BOTTOM BRACKET DROP (CM)	5.3	7.7	★	★	★	★
L FRONT CENTER (CM)	53.7	56.3	58.3	60.2	61.9	63.6
M HEAD TUBE LENGTH (CM)	10.0	8.0	9.8	11.8	13.7	15.6
N STACK (CM)	46.5	48.7	50.7	52.7	54.7	56.7
O REACH (CM)	36.0	37.5	39.0	40.5	42.0	43.5

* THE SLICE SEAT POST HAS TWO POSITIONS FOR MOUNTING THE SADDLE. A FULL RANGE OF ANGLES FROM 77 TO 81 DEGREES IS ACHIEVABLE DEPENDING ON THE RIDER'S PREFERENCE AND/OR THE EVENT.

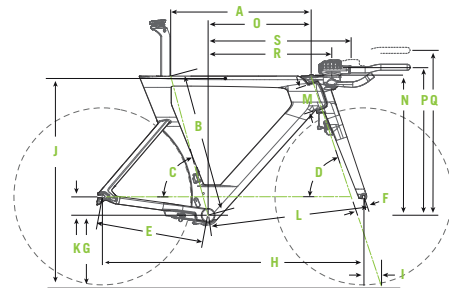


SUPERX

SPECIFICATIONS	44	48	52	54	56	58
A HORIZONTAL TOP TUBE LENGTH (CM)	51.0	52.0	54.0	55.0	57.0	59.0
B MEASURED SIZE (CM)*	44.0	48.0	52.0	54.0	56.0	58.0
C SEAT TUBE ANGLE	75°	74°	73.5°	73.5°	73°	★
D HEAD TUBE ANGLE	69.0°	69.5°	71.5°	72°	72.5°	72.5°
E CHAIN STAY LENGTH (CM)	43.0	★	★	★	★	★
F FORK RAKE (CM)	4.5	★	★	★	★	★
G BOTTOM BRACKET HEIGHT (CM)	28.1	★	★	★	★	★
H WHEELBASE (CM)	101.7	101.4	101.1	101.7	102.6	104.7
I TRAIL (CM)	8.5	8.4	7.0	6.7	6.4	★
J STANDOVER AT TOP TUBE MIDPOINT (CM)	74.9	77.0	80.4	82.2	83.6	85.5
K BOTTOM BRACKET DROP (CM)	6.7	★	★	★	★	★
L FRONT CENTER DISTANCE (CM)	59.6	59.3	59.0	59.6	60.5	62.6
M HEAD TUBE LENGTH (CM)	10.0	11.0	13.5	15.0	16.0	18.0
N STACK (CM)	51.8	52.9	56.0	57.6	58.8	60.7
O REACH (CM)	37.1	36.8	37.4	37.9	39.0	40.5

* THE MEASURED SIZE IS FROM THE CENTER OF THE BOTTOM BRACKET TO THE TOP OF THE TOP TUBE. MEASURED ALONG THE SEAT TUBE AXIS.

CAADX


SPECIFICATIONS	44	48	51	54	56	58	61
A HORIZONTAL TOP TUBE LENGTH (CM)	51.5	52.5	53.5	54.5	56.0	57.5	59.0
B MEASURED SIZE (CM)*	44.0	47.0	50.0	53.0	55.0	57.0	60.0
C SEAT TUBE ANGLE	75.0°	74.5°	74.0°	73.5°	73.0°	73.0°	72.5°
D HEAD TUBE ANGLE	69.5°	70.5°	71.0°	72.0°	72.5°	★	★
E CHAINSTAY LENGTH (CM)	43.2	★	★	★	★	★	★
F FORK RAKE (CM)	4.5	★	★	★	★	★	★
G BOTTOM BRACKET HEIGHT (CM)	26.7	★	★	★	★	★	★
H WHEELBASE (CM)	101.0	101.1	101.4	101.2	101.8	★	★
I TRAIL (CM)	7.7	7.1	6.7	6.1	5.8	★	★
J STANDOVER AT TOP TUBE MIDPOINT (CM)	73.9	76.2	78.5	80.7	82.0	84.0	86.0
K BOTTOM BRACKET DROP (CM)	6.7	★	★	★	★	★	★
L FRONT CENTER DISTANCE (CM)	58.7	58.8	59.1	58.9	59.5	61.0	62.0
M HEAD TUBE LENGTH (CM)	12.0	13.0	14.5	15.5	16.0	18.0	20.0
N STACK (CM)	51.2	52.5	54.1	55.4	56.0	58.0	60.0
O REACH (CM)	36.9	37.4	37.6	37.9	38.8	39.7	40.1

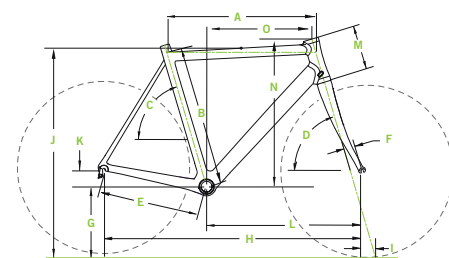

MOUNTAIN - FULL SUSPENSION


JEKYLL CARBON / JEKYLL ALLOY

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	42/16.5	45.2/17.8	48.3/19	50.8/20
B TOP TUBE HORIZONTAL (CM/IN)	56.2/22.1	59.2/23.3	62/24.4	65/25.6
C TOP TUBE ACTUAL (CM/IN)	53.6/21.1	56.3/22.2	59.1/23.2	62/24.4
D HEAD TUBE ANGLE	67°	★	★	★
E SEAT TUBE ANGLE EFFECTIVE	75.1°	74.9°	74.8°	74.7°
E' SEAT TUBE ANGLE ACTUAL	73°	★	★	★
F STANDOVER* (CM/IN)	76.7/30.2	77/30.3	77.3/30.4	77.6/30.6
G HEAD TUBE LENGTH (CM/IN)	11/4.3	★	12.2/4.8	13.4/5.3
H WHEELBASE (CM/IN)	115.2/45.4	118/46.4	120.8/47.6	123.9/48.8
I FRONT CENTER (CM/IN)	71.2/28	74/29.1	76.9/30.3	79.9/31.5
J CHAIN STAY LENGTH (CM/IN)	44/17.3	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	-0.7/-0.3	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	36.4/14.3	★	★	★
M FORK RAKE (CM/IN)	5/2	★	★	★
N TRAIL (CM/IN)	9.7/3.8	★	★	★
O STACK (CM/IN)	58.5/23	★	59.7/23.5	60.8/23.9
P REACH (CM/IN)	40.6/16	43.4/17.1	45.8/18	48.4/19

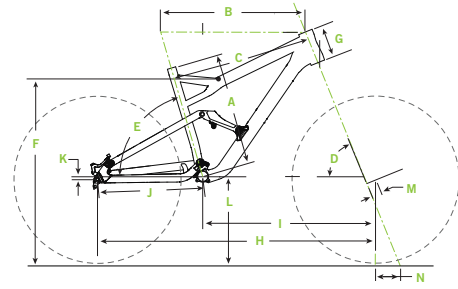


TRIGGER CARBON / TRIGGER ALLOY

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	43.2/17.0	45.7/18.0	48.3/19.0	50.8/20.0
B TOP TUBE HORIZONTAL (CM/IN)	56.6/22.3	59.8/23.5	62.4/24.6	65.2/25.7
C TOP TUBE ACTUAL (CM/IN)	53.0/20.9	56.1/22.1	58.7/23.1	61.6/24.3
D HEAD TUBE ANGLE	68.0°	★	★	★
E SEAT TUBE ANGLE EFFECTIVE	73.5°	★	★	★
E' SEAT TUBE ANGLE ACTUAL	70.1°	70.5°	70.7°	71.0°
F STANDOVER* (CM/IN)	73.1/28.8	74.2/29.2	75.4/29.7	76.6/30.2
G HEAD TUBE LENGTH (CM/IN)	9.7/3.8	11.0/4.3	12.2/4.8	13.4/5.3
H WHEELBASE (CM/IN)	111.8/44.0	115.1/45.3	117.9/46.4	120.8/47.5
I FRONT CENTER (CM/IN)	68.0/26.8	71.3/28.1	74.1/29.2	77.0/30.3
J CHAIN STAY LENGTH (CM/IN)	43.8/17.2	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	0.2/0.1	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	35.1/13.8	★	★	★
M FORK RAKE (CM/IN)	5.0/2.0	★	★	★
N TRAIL (CM/IN)	8.9/3.5	★	★	★
O STACK (CM/IN)	56.5/22.2	57.6/22.7	58.8/23.2	59.9/23.6
P REACH (CM/IN)	39.9/15.7	42.7/16.8	45.0/17.7	47.4/18.7

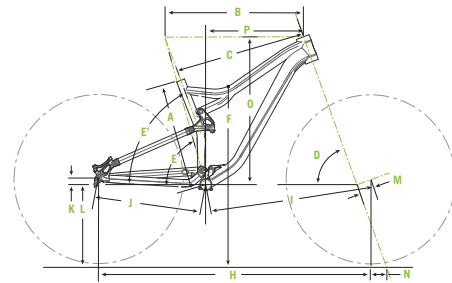

TRIGGER 29 CARBON / TRIGGER 29 ALLOY

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	42.5/16.7	44.5/17.5	48.5/19.1	50.9/20.0
B TOP TUBE HORIZONTAL (CM/IN)	57.8/22.8	60.6/23.9	63.4/25.0	66.2/26.1
C TOP TUBE ACTUAL (CM/IN)	53.2/20.9	55.9/22.0	58.5/23.0	61.3/24.1
D HEAD TUBE ANGLE	69.0°	★	69.5°	★
E SEAT TUBE ANGLE EFFECTIVE	73.5°	★	★	★
E' SEAT TUBE ANGLE ACTUAL	67.5°	68.5°	★	69.0°
F STANDOVER* (CM/IN)	74.5/29.3	76.0/29.9	77.5/30.5	78.9/31.1
G HEAD TUBE LENGTH (CM/IN)	9.7/3.8	11.0/4.3	12.2/4.8	13.4/5.3
H WHEELBASE (CM/IN)	112.4/44.3	115.3/45.4	117.6/46.3	120.5/47.4
I FRONT CENTER (CM/IN)	67.8/26.7	70.7/27.8	73.0/28.7	75.8/29.9
J CHAIN STAY LENGTH (CM/IN)	44.8/17.6	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	2.8/1.1	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	34.8/13.7	★	★	★
M FORK RAKE (CM/IN)	6.0/2.4	★	★	★
N TRAIL (CM/IN)	8.8/3.4	★	8.4/3.3	★
O STACK (CM/IN)	60.4/23.8	61.6/24.2	63.0/24.8	64.1/25.2
P REACH (CM/IN)	39.9/15.7	42.4/16.7	44.7/17.6	47.2/18.6

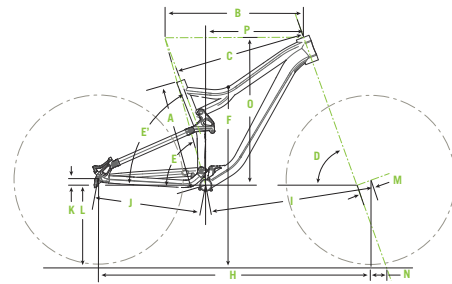


MOUNTAIN - FULL SUSPENSION

SCALPEL 29 CARBON

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	42.0/16.5	44.5/17.5	48.5/19.1	53.5/21.1
B TOP TUBE HORIZONTAL (CM/IN)	56.9/22.4	59.3/23.3	61.7/24.3	64.1/25.2
C TOP TUBE ACTUAL (CM/IN)	53.5/21.1	55.5/21.9	57.8/22.8	60.5/23.8
D HEAD TUBE ANGLE	70.5°	71.0°	71.2°	71.4°
E SEAT TUBE ANGLE EFFECTIVE	73.5°	★	★	★
E' SEAT TUBE ANGLE ACTUAL	70.5°	★	★	★
F STANDOVER* (CM/IN)	73.6/29.0	74.7/29.4	75.6/29.8	77.2/30.4
G HEAD TUBE LENGTH (CM/IN)	12.2/4.8	★	★	★
H WHEELBASE (CM/IN)	108.1/42.6	109.9/43.3	112.1/44.1	114.3/45.0
I FRONT CENTER (CM/IN)	64.0/25.2	65.8/25.9	68.0/26.8	70.1/27.6
J CHAIN STAY LENGTH (CM/IN)	44.4/17.5	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	3.8/1.5	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	33.2/13.1	★	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★	★
N TRAIL (CM/IN)	8.3/3.3	8.0/3.1	7.8/3.1	7.7/3.0
O STACK (CM/IN)	60.9/24.0	61.1/24.1	61.2/24.1	61.3/24.1
P REACH (CM/IN)	38.9/15.3	41.2/16.2	43.6/17.2	45.9/18.1


SCALPEL 29 ALLOY

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	41.1/16.2	43/16.9	48.5/19.1	53.5/21.1
B TOP TUBE HORIZONTAL (CM/IN)	57/22.4	59.4/23.4	61.8/24.3	64.2/25.3
C TOP TUBE ACTUAL (CM/IN)	53.2/20.9	55.3/21.8	57.8/22.8	60.8/23.9
D HEAD TUBE ANGLE	70.5°	71.0°	71.2°	71.4°
E SEAT TUBE ANGLE EFFECTIVE	73.9°	73.7°	73.5°	73.3°
E' SEAT TUBE ANGLE ACTUAL	70.5°	★	★	★
F STANDOVER* (CM/IN)	73.6/29	73.4/28.9	75.3/29.6	76.6/30.1
G HEAD TUBE LENGTH (CM/IN)	12.2/4.8	★	★	★
H WHEELBASE (CM/IN)	108.6/42.8	110.2/43.4	112.2/44.2	114.1/44.9
I FRONT CENTER (CM/IN)	64.5/25.4	66.1/26	68/26.8	70/27.5
J CHAIN STAY LENGTH (CM/IN)	44.4/17.5	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	3.8/1.5	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	33.2/13.1	★	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★	★
N TRAIL (CM/IN)	8.3/3.3	8.0/3.1	7.8/3.1	7.7/3.0
O STACK (CM/IN)	60.9/24.0	61.1/24.1	61.2/24.1	61.3/24.1
P REACH (CM/IN)	39.4/15.5	41.5/16.3	43.6/17.2	45.8/18.0

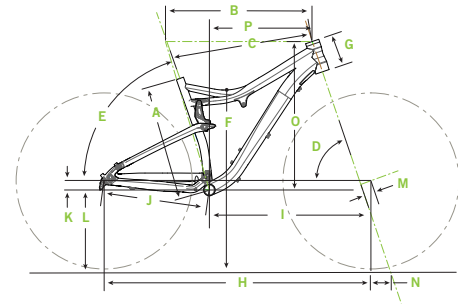

RUSH 29 ALLOY


SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	42.0/16.5	44.5/17.5	48.5/19.1	52.5/20.7
B TOP TUBE HORIZONTAL (CM/IN)	56.8/22.4	59.3/23.3	61.7/24.3	64.1/25.2
C TOP TUBE ACTUAL (CM/IN)	56.6/22.3	59.1/23.3	61.5/24.2	63.9/25.2
D HEAD TUBE ANGLE	70.0°	★	★	★
E SEAT TUBE ANGLE EFFECTIVE	73.5°	★	★	★
E' SEAT TUBE ANGLE ACTUAL	72.5°	★	★	★
F STANDOVER* (CM/IN)	73.3/28.9	74.2/29.2	77.5/30.5	78.2/30.8
G HEAD TUBE LENGTH (CM/IN)	10.2/4.0	★	★	★
H WHEELBASE (CM/IN)	110.2/43.4	112.7/44.4	115.1/45.3	117.6/46.3
I FRONT CENTER (CM/IN)	65.1/25.6	67.5/26.6	70.0/27.6	72.5/28.5
J CHAIN STAY LENGTH (CM/IN)	45.4/17.9	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	3.8/1.5	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	33.2/13.1	★	★	★
M FORK RAKE (CM/IN)	5.1/2.0	★	★	★
N TRAIL (CM/IN)	8.0/3.1	★	★	★
O STACK (CM/IN)	60.2/23.7	★	61.3/24.1	62.5/24.6
P REACH (CM/IN)	39.0/15.4	41.5/16.3	43.5/17.1	45.6/17.9

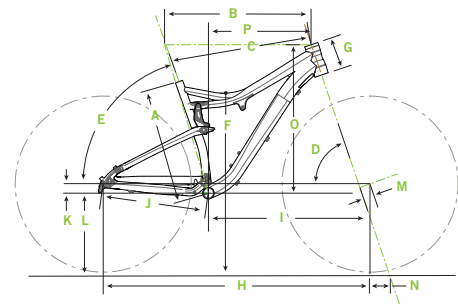

MOUNTAIN – FRONT SUSPENSION


F-SI 29 CARBON

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	38.5 /15	43.5 /17	48.5 /19	53.5 /21
B TOP TUBE HORIZONTAL (CM/IN)	57.3 /22.6	59.6 /23.5	62.3 /24.5	64.8 /25.5
C TOP TUBE ACTUAL (CM/IN)	55.2 /21.7	56.5 /22.2	58.7 /23.1	61.2 /24.1
D HEAD TUBE ANGLE	69.5°	★	★	★
E SEAT TUBE ANGLE	73.3°	73.2°	73.1°	73°
F STANDOVER MIDPOINT (CM/IN)	76.8 /30.2	78.1 /30.7	81.9 /32.2	85 /33.5
G HEAD TUBE LENGTH (CM/IN)	9.7 /3.8	9.7 /3.8	11 /4.3	12.2 /4.8
H WHEELBASE (CM/IN)	107.6 /42.4	109.7 /43.2	112.3 /44.2	114.7 /45.2
I FRONT CENTER (CM/IN)	65.2 /25.7	67.3 /26.5	69.8 /27.5	72.2 /28.4
J CHAIN STAY LENGTH (CM/IN)	42.9 /16.9	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	6.2 /2.4	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	30.8 /12.1	★	★	★
M FORK RAKE (CM/IN)	5.5 /2.2	★	★	★
N TRAIL (CM/IN)	7.9 /3.1	7.8 /3.1	7.8 /3.1	7.7 /3
O STACK (CM/IN)	60.2 /23.7	60.3 /23.7	61.5 /24.2	62.8 /24.7
P REACH (CM/IN)	39.2 /15.4	41.4 /16.3	43.6 /17.2	45.7 /18

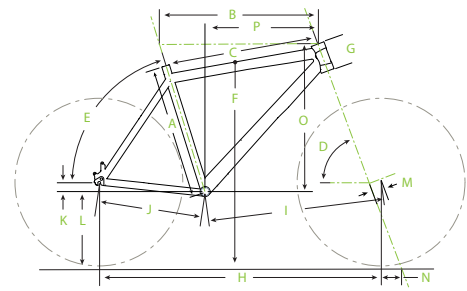


F29 CARBON / F29 ALLOY

SPECIFICATIONS	SM (CARBON)	SM (ALLOY)	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	38.0 /15.0	39.0 /15.4	43.3 /17.0	47.5 /18.7	52.5 /20.7
B TOP TUBE HORIZONTAL (CM/IN)	56.5 /22.2	★	59.3 /23.3	62.2 /24.5	64.1 /25.2
C TOP TUBE ACTUAL (CM/IN)	55.4 /21.8	56.4 /22.2	57.8 /22.8	59.7 /23.5	61.2 /24.1
D HEAD TUBE ANGLE	71.0°	★	★	★	71.5°
E SEAT TUBE ANGLE	73.5°	★	★	73.0°	72.5°
F STANDOVER MIDPOINT (CM/IN)	73.6 /29.0	78.8 /31.0	80.9 /31.9	82.9 /32.6	85.3 /33.6
G HEAD TUBE LENGTH (CM/IN)	13.4 /5.3	★	★	★	★
H WHEELBASE (CM/IN)	106.0 /41.7	★	108.8 /42.8	111.1 /43.7	111.8 /44.0
I FRONT CENTER (CM/IN)	62.4 /24.6	★	65.2 /25.7	67.5 /26.6	68.2 /26.9
J CHAIN STAY LENGTH (CM/IN)	44.4 /17.5	★	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	6.5 /2.6	★	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	30.5 /12.0	★	★	★	★
M FORK RAKE (CM/IN)	4.5 /1.8	★	★	★	★
N TRAIL (CM/IN)	8.0 /3.1	★	★	★	7.6 /3.0
O STACK (CM/IN)	64.0 /25.2	64.1 /25.2	★	★	64.2 /25.3
P REACH (CM/IN)	37.5 /14.8	★	40.3 /15.9	42.6 /16.8	43.8 /17.3

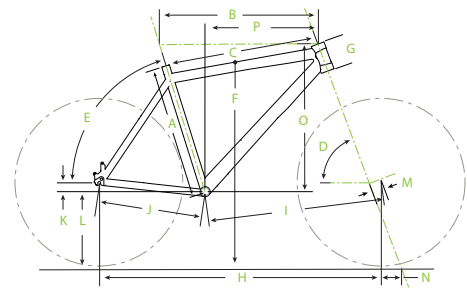


TRAIL SL 29

SPECIFICATIONS	SM	MD	LG	XL	2X
A SEAT TUBE LENGTH (CM/IN)	38.0 /15.0	43.3 /17.0	47.5 /18.7	52.5 /20.7	57.0 /22.4
B TOP TUBE HORIZONTAL (CM/IN)	55.0 /21.7	59.4 /23.4	62.3 /24.5	64.0 /25.2	65.0 /25.6
C TOP TUBE ACTUAL (CM/IN)	54.2 /21.3	57.4 /22.6	59.6 /23.5	61.1 /24.1	62.4 /24.6
D HEAD TUBE ANGLE	71.0°	★	★	★	71.5°
E SEAT TUBE ANGLE	73.5°	★	73.0°	72.5°	★
F STANDOVER MIDPOINT (CM/IN)	76.3 /30.0	79.4 /31.3	81.9 /32.2	84.9 /33.4	87.8 /34.5
G HEAD TUBE LENGTH (CM/IN)	9.0 /3.5	10.2 /4.0	11.4 /4.5	12.7 /5.0	14.0 /5.5
H WHEELBASE (CM/IN)	104.3 /41.1	108.8 /42.8	111.1 /43.7	112.3 /44.2	112.7 /44.4
I FRONT CENTER (CM/IN)	60.7 /23.9	65.2 /25.7	67.5 /26.6	68.7 /27.0	69.1 /27.2
J CHAIN STAY LENGTH (CM/IN)	44.4 /17.5	★	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	6.5 /2.6	★	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	30.5 /12.0	★	★	★	★
M FORK RAKE (CM/IN)	4.5 /1.8	★	★	★	★
N TRAIL (CM/IN)	8.0 /3.1	★	★	★	7.6 /3.0
O STACK (CM/IN)	59.8 /23.5	61.0 /24.0	62.2 /24.5	63.4 /25.0	64.8 /25.5
P REACH (CM/IN)	37.3 /14.7	41.3 /16.3	43.3 /17.0	44.0 /17.3	44.6 /17.6

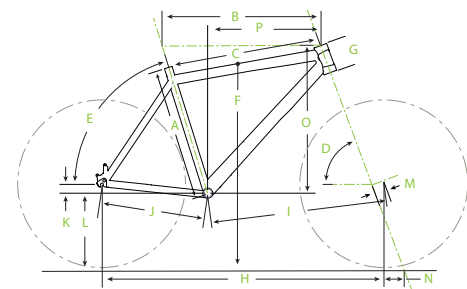

TRAIL

SPECIFICATIONS	XS*	SM*	MD	LG	XL	2X
A SEAT TUBE LENGTH (CM/IN)	34.5 /13.6	38.0 /15.0	43.3 /17.0	47.5 /18.7	52.5 /20.7	57.0 /22.4
B TOP TUBE HORIZONTAL (CM/IN)	55.5 /21.9	58.5 /23.0	59.4 /23.4	62.3 /24.5	64.0 /25.2	65.0 /25.6
C TOP TUBE ACTUAL (CM/IN)	54.1 /21.3	56.5 /22.2	57.4 /22.6	59.6 /23.5	61.1 /24.1	62.4 /24.6
D HEAD TUBE ANGLE	70.0°	★	★	★	★	71.5°
E SEAT TUBE ANGLE	73.5°	★	★	73.0°	72.5°	★
F STANDOVER MIDPOINT (CM/IN)	73.5°	★	79.4 /31.3	81.9 /32.2	84.9 /33.4	87.8 /34.5
G HEAD TUBE LENGTH (CM/IN)	39.7 /15.6	42.1 /16.6	10.2 /4.0	11.4 /4.5	12.7 /5.0	14.0 /5.5
H WHEELBASE (CM/IN)	9.0 /3.5	10.3 /4.1	108.8 /42.8	111.1 /43.7	112.3 /44.2	112.7 /44.4
I FRONT CENTER (CM/IN)	105.9 /41.7	109.0 /42.9	65.2 /25.7	67.5 /26.6	68.7 /27.0	69.1 /27.2
J CHAIN STAY LENGTH (CM/IN)	62.8 /24.7	65.9 /25.9	★	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	43.5 /17.1	★	★	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	4.3 /1.7	★	★	★	★	★
M FORK RAKE (CM/IN)	31.4 /12.4	★	★	★	★	★
N TRAIL (CM/IN)	4.5 /1.8	★	★	★	★	7.6 /3.0
O STACK (CM/IN)	8.2 /3.2	*	61.0 /24.0	62.2 /24.5	63.4 /25.0	64.8 /25.5
P REACH (CM/IN)	57.6 /22.7	58.9 /23.2	41.3 /16.3	43.3 /17.0	44.0 /17.3	44.6 /17.6

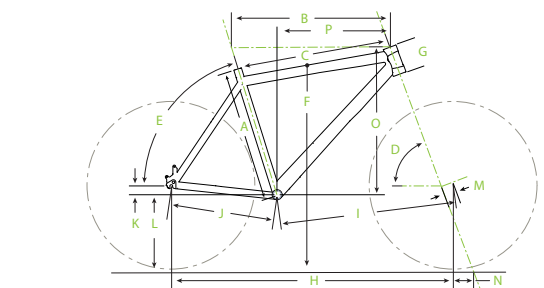

* INDICATES 27.5" WHEELS

★ INDICATES SAME AS PREVIOUS SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


URBAN

BAD BOY HEADSHOK

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	39.0/15.4	46.0/18.1	51.0/20.1	56.0/22.0
B TOP TUBE HORIZONTAL (CM/IN)	55.0/21.7	57.5/22.6	60.0/23.6	62.0/24.4
C TOP TUBE ACTUAL (CM/IN)	57.5/22.6	54.7/21.5	57.3/22.6	59.7/23.5
D HEAD TUBE ANGLE	70°	71°	★	★
E SEAT TUBE ANGLE	74.5°	73.5°	73.0°	72.5°
F STANDOVER HEIGHT (CM)	72.0	80.4	82.6	84.7
G HEAD TUBE LENGTH (CM)	11.4	★	★	★
H WHEELBASE (CM)	104.4	105.8	108.1	109.8
I FRONT CENTER (CM)	61.4	62.8	65.1	66.8
J CHAIN STAY LENGTH (CM)	43.5	★	★	★
K BOTTOM BRACKET DROP (CM)	5.1	★	★	★
L BOTTOM BRACKET HEIGHT (CM)	29.5	★	★	★
M FORK RAKE (CM)	4.5	★	★	★
N TRAIL (CM)	7.8	7.2	★	★
O STACK (CM/IN)	59.4/23.4	59.8/23.5	59.8/23.5	59.8/23.5
P REACH (CM/IN)	37.6/14.8	39.3/15.5	41.3/16.3	42.8/16.9

BAD BOY

SM	MD	LG	XL
39.0/15.4	46.0/18.1	51.0/20.1	56.0/22.0
55.0/21.7	57.5/22.6	60.0/23.6	62.0/24.4
57.5/22.6	54.7/21.5	57.3/22.6	59.7/23.5
70°	71°	★	★
74.5°	73.5°	73.0°	72.5°
72.0	80.4	82.6	84.7
13.0	15.0	17.0	19.0
104.4	105.8	108.1	109.8
61.4	62.8	65.1	66.8
43.5	★	★	★
5.1	★	★	★
29.5	★	★	★
4.5	★	★	★
7.8	7.2	★	★
60.9/24.0	63.2/24.9	65.1/25.6	67.0/26.4
37.1/14.6	38.1/15.0	39.5/15.5	40.4/15.9

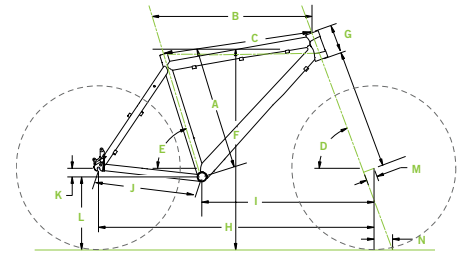


CONTRO

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	39/15.4	46/18.1	51/20.1	56/22.0
B TOP TUBE HORIZONTAL (CM/IN)	54/21.3	56.5/22.2	59/23.2	61/24.0
C TOP TUBE ACTUAL (CM/IN)	52/20.5	54/21.3	57/22.4	59/23.2
D HEAD TUBE ANGLE	70°	71°	★	★
E SEAT TUBE ANGLE	73.5°	★	★	★
F STANDOVER (CM/IN)	69/27.2	69.5/27.4	73.5/28.9	76/29.9
G HEAD TUBE LENGTH (CM/IN)	16/6.3	★	★	★
H WHEELBASE (CM/IN)	104/40.9	105/41.3	108/42.5	110/43.3
I FRONT CENTER (CM/IN)	61/24.0	62.5/24.6	65/25.6	67/26.4
J CHAIN STAY LENGTH (CM/IN)	43.5/17.1	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	5.1/2.0	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	29/11.4	★	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★	★
N TRAIL (CM/IN)	7.8/3.1	7.1/2.8	★	★
O STACK (CM/IN)	56/22.0	57/22.4	57/22.4	57/22.4
P REACH (CM/IN)	37/14.6	39/15.4	42/16.5	44/17.3


CONTRO HEADSHOK

SM	MD	LG	XL
39/15.4	46/18.1	51/20.1	56/22.0
54/21.3	56.5/22.2	59/23.2	61/24.0
52/20.5	54/21.3	57/22.4	59/23.2
70°	71°	★	★
73.5°	★	★	★
69/27.2	69.5/27.4	73.5/28.9	76/29.9
16/6.3	★	★	★
104/40.9	105/41.3	108/42.5	110/43.3
61/24.0	62.5/24.6	65/25.6	67/26.4
43.5/17.1	★	★	★
5.1/2.0	★	★	★
29/11.4	★	★	★
4.5/1.8	★	★	★
7.8/3.1	7.1/2.8	★	★
63/24.8	64/25.2	64/25.2	64/25.2
35/13.8	37/14.6	40/15.7	42/16.5

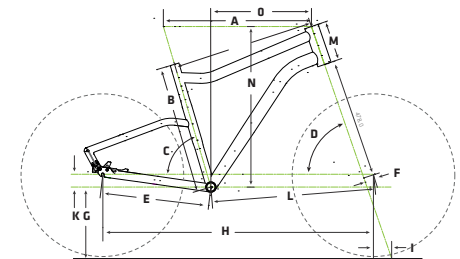


HOOIGAN

SPECIFICATIONS	SM
A SEAT TUBE LENGTH (CM/IN)	35.0
B TOP TUBE HORIZONTAL (CM/IN)	52.0
C TOP TUBE ACTUAL (CM/IN)	50.6
D HEAD TUBE ANGLE	68.0°
E SEAT TUBE ANGLE	73.0°
F STANDOVER HEIGHT (CM)	57.8
G HEAD TUBE LENGTH (CM)	19.1
H WHEELBASE (CM)	101.5
I FRONT CENTER (CM)	61.8
J CHAIN STAY LENGTH (CM)	40.0
K BOTTOM BRACKET DROP (CM)	-3.6
L BOTTOM BRACKET HEIGHT (CM)	27.7
M FORK RAKE (CM)	4.5
N TRAIL (CM)	4.5

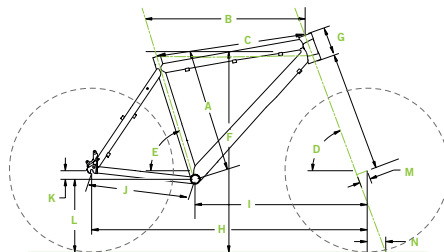

ENFORCEMENT 29

SPECIFICATIONS	SM	MD	LG	XL	2X
A SEAT TUBE LENGTH (CM/IN)	38.0/15.0	43.3/17.0	47.5/18.7	52.5/20.7	57.0/22.4
B TOP TUBE HORIZONTAL (CM/IN)	55.0/21.7	59.4/23.4	62.3/24.5	64.0/25.2	65.0/25.6
C TOP TUBE ACTUAL (CM/IN)	54.2/21.3	57.4/22.6	59.6/23.5	61.1/24.1	62.4/24.6
D HEAD TUBE ANGLE	71.0°	★	★	★	71.5°
E SEAT TUBE ANGLE	73.5°	★	73.0°	72.5°	★
F STANDOVER (CM/IN)	76.3/30.0	79.4/31.3	81.9/32.2	84.9/33.4	87.8/34.5
G HEAD TUBE LENGTH (CM/IN)	9.0/3.5	10.2/4.0	11.4/4.5	12.7/5.0	14.0/5.5
H WHEELBASE (CM/IN)	104.3/41.1	108.8/42.8	111.1/43.7	112.3/44.2	112.7/44.4
I FRONT CENTER (CM/IN)	60.7/23.9	65.2/25.7	67.5/26.6	68.7/27.0	69.1/27.2
J CHAIN STAY LENGTH (CM/IN)	44.4/17.5	★	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	6.5/2.6	★	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	30.5/12.0	★	★	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★	★	★
N TRAIL (CM/IN)	8.0/3.1	★	★	★	7.6/3.0
O STACK (CM/IN)	59.8/23.5	61.0/24.0	62.2/24.5	63.4/25.0	64.8/25.5
P REACH (CM/IN)	37.3/14.7	41.3/16.3	43.3/17.0	44.0/17.3	44.6/17.6

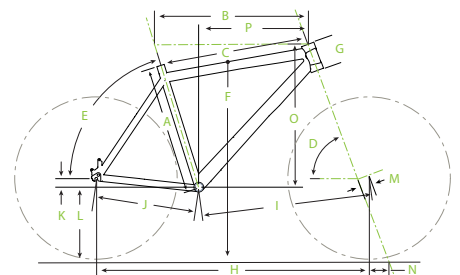

★ INDICATES SAME AS PREVIOUS SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


URBAN

BAD BOY HEADSHOK

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	39.0/15.4	46.0/18.1	51.0/20.1	56.0/22.0
B TOP TUBE HORIZONTAL (CM/IN)	55.0/21.7	57.5	60.0	62.0
C TOP TUBE ACTUAL (CM/IN)	57.5/22.6	54.7/21.5	57.3/22.6	59.7/23.5
D HEAD TUBE ANGLE	60.0/23.6	71.0°	★	★
E SEAT TUBE ANGLE	62.0/24.4	73.5°	73.0°	72.5°
F STANDOVER HEIGHT (CM)	77.0	80.4	82.6	84.7
G HEAD TUBE LENGTH (CM)	11.4	★	★	★
H WHEELBASE (CM)	104.4	105.8	108.1	109.8
I FRONT CENTER (CM)	61.4	62.8	65.1	66.8
J CHAIN STAY LENGTH (CM)	43.5	★	★	★
K BOTTOM BRACKET DROP (CM)	5.1	★	★	★
L BOTTOM BRACKET HEIGHT (CM)	29.5	★	★	★
M FORK RAKE (CM)	4.5	★	★	★
N TRAIL (CM)	7.8	7.2	★	★
O STACK (CM/IN)	59.4/23.4	59.8/23.5	59.8/23.5	59.8/23.5
P REACH (CM/IN)	37.6/14.8	39.3/15.5	41.3/16.3	42.8/16.9

BAD BOY

SM	MD	LG	XL
39.0/15.4	46.0/18.1	51.0/20.1	56.0/22.0
55.0/21.7	57.5	60.0	62.0
57.5/22.6	54.7/21.5	57.3/22.6	59.7/23.5
60.0/23.6	71.0°	★	★
62.0/24.4	73.5°	73.0°	72.5°
77.0	80.4	82.6	84.7
13.0	15.0	17.0	19.0
104.4	105.8	108.1	109.8
61.4	62.8	65.1	66.8
43.5	★	★	★
5.1	★	★	★
29.5	★	★	★
4.5	★	★	★
7.8	7.2	★	★
60.9/24.0	63.2/24.9	65.1/25.6	67.0/26.4
37.1/14.6	38.1/15.0	39.5/15.5	40.4/15.9

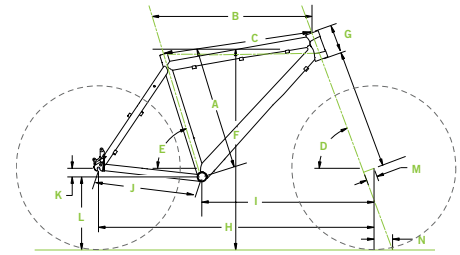


CONTRO

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	39/15.4	46/18.1	51/20.1	56/22.0
B TOP TUBE HORIZONTAL (CM/IN)	54/21.3	56.5/22.2	59/23.2	61/24.0
C TOP TUBE ACTUAL (CM/IN)	52/20.5	54/21.3	57/22.4	59/23.2
D HEAD TUBE ANGLE	70	71	★	★
E SEAT TUBE ANGLE	73.5	★	★	★
F STANDOVER (CM/IN)	69/27.2	69.5/27.4	73.5/28.9	76/29.9
G HEAD TUBE LENGTH (CM/IN)	16/6.3	★	★	★
H WHEELBASE (CM/IN)	104/40.9	105/41.3	108/42.5	110/43.3
I FRONT CENTER (CM/IN)	61/24.0	62.5/24.6	65/25.6	67/26.4
J CHAIN STAY LENGTH (CM/IN)	43.5/17.1	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	5.1/2.0	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	29/11.4	★	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★	★
N TRAIL (CM/IN)	7.8/3.1	7.1/2.8	★	★
O STACK (CM/IN)	56/22.0	57/22.4	57/22.4	57/22.4
P REACH (CM/IN)	37/14.6	39/15.4	42/16.5	44/17.3


CONTRO HEADSHOK

SM	MD	LG	XL
39/15.4	46/18.1	51/20.1	56/22.0
54/21.3	56.5/22.2	59/23.2	61/24.0
52/20.5	54/21.3	57/22.4	59/23.2
70	71	★	★
73.5	★	★	★
69/27.2	69.5/27.4	73.5/28.9	76/29.9
16/6.3	★	★	★
104/40.9	105/41.3	108/42.5	110/43.3
61/24.0	62.5/24.6	65/25.6	67/26.4
43.5/17.1	★	★	★
5.1/2.0	★	★	★
29/11.4	★	★	★
4.5/1.8	★	★	★
7.8/3.1	7.1/2.8	★	★
63/24.8	64/25.2	64/25.2	64/25.2
35/13.8	37/14.6	40/15.7	42/16.5

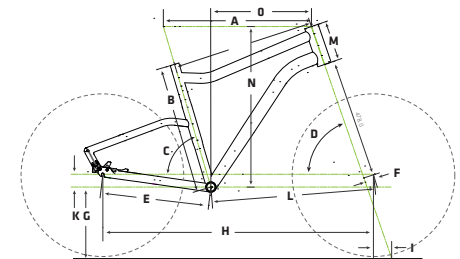


HOOOLIGAN

SPECIFICATIONS	SM	OS
A SEAT TUBE LENGTH (CM/IN)	35.0	35.0/13.9
B TOP TUBE HORIZONTAL (CM/IN)	52.0	57.0/22.4
C TOP TUBE ACTUAL (CM/IN)	50.6	54.8/21.6
D HEAD TUBE ANGLE	68.0°	70.0°
E SEAT TUBE ANGLE	73.0°	73.0°
F STANDOVER HEIGHT (CM)	57.8	59.5
G HEAD TUBE LENGTH (CM)	19.1	19.0
H WHEELBASE (CM)	101.5	105.6
I FRONT CENTER (CM)	61.8	65.8
J CHAIN STAY LENGTH (CM)	40.0	40.0
K BOTTOM BRACKET DROP (CM)	-3.6	-3.6
L BOTTOM BRACKET HEIGHT (CM)	27.7	29.0
M FORK RAKE (CM)	4.5	4.5
N TRAIL (CM)	4.5	4.5
O STACK (CM/IN)		
P REACH (CM/IN)		

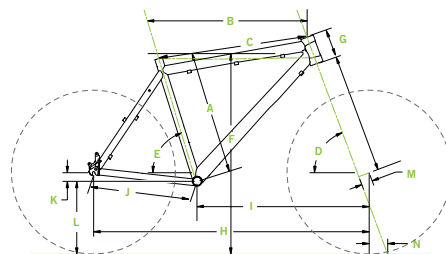

ENFORCEMENT 29

SPECIFICATIONS	SM	MD	LG	XL	2X
A SEAT TUBE LENGTH (CM/IN)	38.0/15.0	43.3/17.0	47.5/18.7	52.5/20.7	57.0/22.4
B TOP TUBE HORIZONTAL (CM/IN)	55.0/21.7	59.4/23.4	62.3/24.5	64.0/25.2	65.0/25.6
C TOP TUBE ACTUAL (CM/IN)	54.2/21.3	57.4/22.6	59.6/23.5	61.1/24.1	62.4/24.6
D HEAD TUBE ANGLE	71.0°	★	★	★	71.5°
E SEAT TUBE ANGLE	73.5°	★	73.0°	72.5°	★
F STANDOVER (CM/IN)	76.3/30.0	79.4/31.3	81.9/32.2	84.9/33.4	87.8/34.5
G HEAD TUBE LENGTH (CM/IN)	9.0/3.5	10.2/4.0	11.4/4.5	12.7/5.0	14.0/5.5
H WHEELBASE (CM/IN)	104.3/41.1	108.8/42.8	111.1/43.7	112.3/44.2	112.7/44.4
I FRONT CENTER (CM/IN)	60.7/23.9	65.2/25.7	67.5/26.6	68.7/27.0	69.1/27.2
J CHAIN STAY LENGTH (CM/IN)	44.4/17.5	★	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	6.5/2.6	★	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	30.5/12.0	★	★	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★	★	★
N TRAIL (CM/IN)	8.0/3.1	★	★	★	7.6/3.0
O STACK (CM/IN)	59.8/23.5	61.0/24.0	62.2/24.5	63.4/25.0	64.8/25.5
P REACH (CM/IN)	37.3/14.7	41.3/16.3	43.3/17.0	44.0/17.3	44.6/17.6

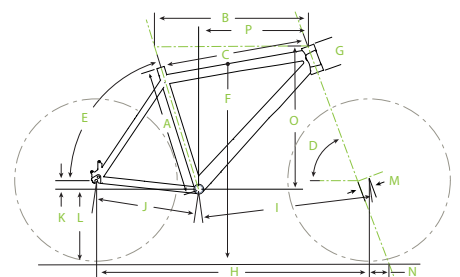


★ INDICATES SAME AS PREVIOUS SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

FITNESS


QUICK CARBON

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)	41.0/16.1	45.0/17.7	50.0/19.7	55.0/21.7
B TOP TUBE HORIZONTAL (CM/IN)	54.5/21.5	56.0/22.0	57.5/22.6	60.5/23.8
C TOP TUBE ACTUAL (CM/IN)	52.7/20.7	54.0/21.3	55.5/21.9	58.3/23.0
D HEAD TUBE ANGLE	70.5°	★	71.0°	71.5°
E SEAT TUBE ANGLE	75.0°	★	74.5°	73.0°
F STANDOVER (CM/IN)	74.8/29.4	77.2/30.4	78.2/30.8	84.3/33.2
G HEAD TUBE LENGTH (CM/IN)	14.0/5.5	15.0/5.9	17.0/6.7	20.0/7.9
H WHEELBASE (CM/IN)	104.6/41.2	106.2/41.8	106.8/42.0	107.6/42.4
I FRONT CENTER (CM/IN)	62.1/24.4	63.6/25.1	64.2/25.3	65.1/25.6
J CHAIN STAY LENGTH (CM/IN)	43.5/17.1	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	7.0/2.8	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	28.3/11.1	★	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★	★
N TRAIL (CM/IN)	7.7/3.0	★	7.4/2.9	7.1/2.8
O STACK (CM/IN)	56.6/22.3	57.5/22.7	59.6/23.5	62.7/24.7
P REACH (CM/IN)	39.3/15.5	40.6/16.0	41.0/16.1	41.3/16.3

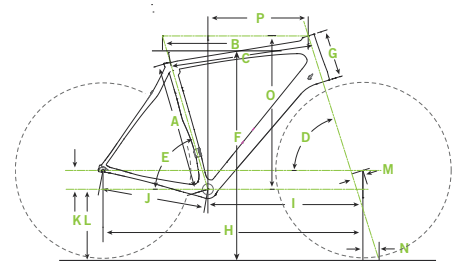


QUICK SPEED

SPECIFICATIONS	SM	MD	LG	XL	J
A SEAT TUBE LENGTH (CM/IN)	44.0/17.3	48.0/18.9	52.0/20.5	56.0/22.0	60.0/23.6
B TOP TUBE HORIZONTAL (CM/IN)	54.5/21.5	56.0/22.0	57.5/22.6	60.5/23.8	63.0/24.8
C TOP TUBE ACTUAL (CM/IN)	49.8/19.6	51.5/20.3	53.2/20.9	55.9/22.0	58.5/23.0
D HEAD TUBE ANGLE	70.5	70.5	71.0	71.5	72
E SEAT TUBE ANGLE	75.0	75.0	74.5	73.0	72.5
F STANDOVER (CM)	74.1	77.9	81.2	84.8	87.9
G HEAD TUBE LENGTH (CM)	13.0	14.0	16.0	19	22
H WHEELBASE (CM/IN)	105.1	106.7	107.2	108.1	109.5
I FRONT CENTER (CM)	62.5	64.1	64.7	65.6	66.9
J CHAIN STAY LENGTH (CM)	43.5	★	★	★	★
K BOTTOM BRACKET DROP (CM)	7.0	★	★	★	★
L BOTTOM BRACKET HEIGHT (CM)	27.4	★	★	★	★
M FORK RAKE (CM)	5.0	★	★	★	★
N TRAIL (CM)	6.9	6.9	6.6	6.2	5.9

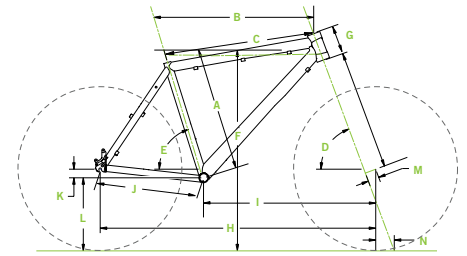

QUICK


SPECIFICATIONS	SM	MD	LG	XL	2X
A SEAT TUBE LENGTH (CM/IN)	41.5/16.3	44.0/17.3	49.0/19.3	54.0/21.3	60.0/23.6
B TOP TUBE HORIZONTAL (CM/IN)	53.5/21.1	55.0/21.7	56.5/22.2	59.5/23.4	62.0/24.4
C TOP TUBE ACTUAL (CM/IN)	52.0/20.5	53.3/21.0	54.5/21.5	57.1/22.5	59.8/23.5
D HEAD TUBE ANGLE	70.5°	★	71.0°	71.5°	72.0°
E SEAT TUBE ANGLE	75.0°	★	74.5°	73.0°	72.5°
F STANDOVER (CM/IN)	72.1/28.4	74.2/29.2	78.0/30.7	82.1/32.3	86.7/34.1
G HEAD TUBE LENGTH (CM/IN)	14.0/5.5	15.0/5.9	17.0/6.7	20.0/7.9	23.0/9.1
H WHEELBASE (CM/IN)	103.6/40.8	105.2/41.4	105.8/41.7	106.6/42.0	108.0/42.5
I FRONT CENTER (CM/IN)	61.0/24.0	62.6/24.6	63.2/24.9	64.1/25.2	65.5/25.8
J CHAIN STAY LENGTH (CM/IN)	43.5/17.1	★	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	7.0/2.8	★	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	27.4/10.8	★	★	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★	★	★
N TRAIL (CM/IN)	7.4/2.9	★	7.1/2.8	6.8/2.7	6.4/2.5
O STACK (CM/IN)	56.2/22.1	57.2/22.5	59.2/23.3	62.3/24.5	65.3/25.7
P REACH (CM/IN)	38.4/15.1	39.7/15.6	40.1/15.8	40.5/15.9	41.4/16.3

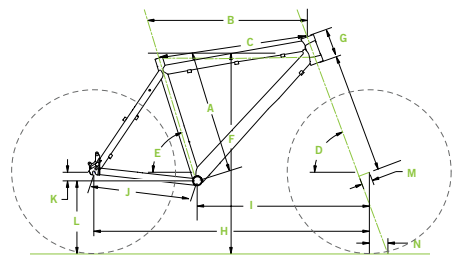

FITNESS


QUICK CX

SPECIFICATIONS	SM	MD	LG	XL	2X
A SEAT TUBE LENGTH OVERALL (CM/IN)	44.0/17.3	48.0/18.9	52.0/20.5	56.0/22.0	60.0/23.6
B TOP TUBE HORIZONTAL (CM/IN)	55.0/21.7	57.0/22.4	58.5/23.0	60.0/23.6	62.0/24.4
C TOP TUBE ACTUAL (CM/IN)	53.3/20.1	54.7/21.5	56.1/22.1	57.6/22.6	59.9/23.6
D HEAD TUBE ANGLE (DEGREES)	69.0°	★	70.0°	70.5°	71.5°
E SEAT TUBE ANGLE (DEGREES)	74.0°	73.5°	73.0°	★	72.5°
F STANDOVER - HEADSHOK (CM/IN)	79.6/31.3	80.9/31.8	82.5/32.5	85.7/33.7	87.3/34.4
F STANDOVER - SUSPENSION (CM/IN)	80.6/31.7	82.5/32.5	84.6/33.3	86.7/34.1	88.9/35.0
F STANDOVER - RIGID (CM/IN)	77.3/30.4	79.1/31.1	81.3/32.0	83.4/32.8	85.6/33.7
G HEAD TUBE LENGTH - HEADSHOK (CM/IN)	11.4/4.5	★	★	★	★
G HEAD TUBE LENGTH - SUSPENSION (CM/IN)	14.0/5.5	15.0/5.9	16.0/6.3	17.0/6.7	18.0/7.1
G HEAD TUBE LENGTH - RIGID (CM/IN)	16.0/6.3	17.0/6.7	18.0/7.1	19.0/7.5	20.0/7.9
H WHEELBASE (CM/IN)	107.2/42.2	108.8/42.8	★	109.8/43.2	110.2/43.4
I FRONT CENTER	62.2/24.5	63.8/25.1	★	64.8/25.5	65.2/25.7
J CHAIN STAY LENGTH (CM)	45.0/17.7	★	★	★	★
K BOTTOM BRACKET DROP (CM)	6.7	★	★	★	★
L BOTTOM BRACKET HEIGHT (CM)	33.2	★	★	★	★
M FORK RAKE (CM)	4.5	★	★	★	★
N TRAIL (CM)	8.7	★	8.1	7.7	7.1
O STACK HEADSHOK (CM/IN)	60.4/23.8	★	60.8/23.9	63.9/25.2	64.3/25.3
P STACK SUSPENSION (CM/IN)	62.2/24.5	63.2/24.9	64.5/25.4	65.7/25.9	67.1/26.4
O STACK RIGID FORK (CM/IN)	56.4/22.2	57.4/22.6	58.7/23.1	59.9/23.6	61.2/24.1
P REACH HEADSHOK (CM/IN)	37.7/14.8	39.1/15.4	39.9/15.7	40.5/15.9	41.7/16.4
O REACH SUSPENSION (CM/IN)	37.2/14.6	38.3/15.1	38.8/15.3	39.9/15.7	40.8/16.1
P REACH RIGID FORK (CM/IN)	38.8/15.3	40/15.7	40.6/16	41.7/16.4	42.7/16.8

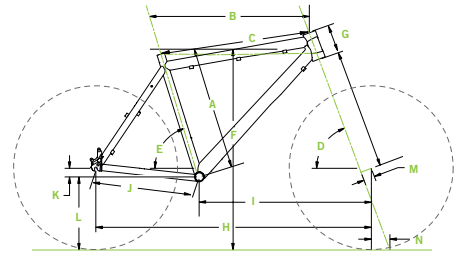

ADVENTURE


SPECIFICATIONS	SM	MD	LG	XL	J/2X
A SEAT TUBE LENGTH (CM/IN)	35.6/14.0	40.6/16.0	45.7/18.0	53.3/21.0	61/24.0
B TOP TUBE HORIZONTAL (CM/IN)	56.5/22.2	57.2/22.5	58/22.8	59/23.2	60/23.6
C TOP TUBE ACTUAL (CM/IN)	N/A	N/A	N/A	N/A	N/A
D HEAD TUBE ANGLE (DEGREES)	69°	★	★	★	★
E SEAT TUBE ANGLE (DEGREES)	70°	★	★	★	★
F STANDOVER (CM/IN)	70/27.6	73.2/28.8	77.2/30.4	82.2/32.4	86.3/34.0
G HEAD TUBE LENGTH (CM/IN)	13.6/5.4	13.6/5.4	15.6/6.1	17/6.7	17/6.7
H WHEELBASE (CM/IN)	105.4/41.5	106.2/41.8	107.1/42.2	108.2/42.6	109.4/43.1
I FRONT CENTER (CM/IN)	59.8/23.5	60.6/23.9	61.4/24.2	62.3/24.5	63.7/25.1
J CHAIN STAY LENGTH (CM/IN)	46.5/18.3	★	★	★	★
K BOTTOM BRACKET DROP (CM/IN)	6.8/2.7	★	★	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	28/11.0	★	★	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★	★	★
N TRAIL (CM/IN)	8.5/3.3	★	★	★	★

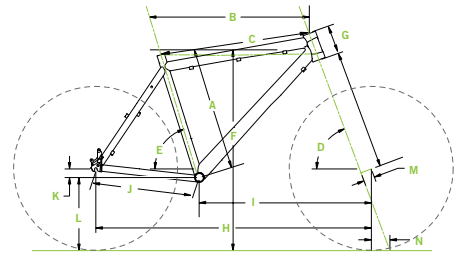

ROAD TANDEM

SPECIFICATIONS	M/S	L/S	X/S	J/M	M/D	L/G
A FRONT SEAT TUBE ANGLE (DEGREES)	73°	★	★	★	73°	★
B REAR SEAT TUBE ANGLE (DEGREES)	73°	★	★	★	73°	★
C HEAD TUBE ANGLE (DEGREES)	71°	73	★	★	72.5°	★
D HORIZONTAL FRONT TOP TUBE LENGTH (IN/CM)	21.5/54.5	22/56	22.6/57.5	23.6/60	23.2/59	24.4/62
E HORIZONTAL REAR TOP TUBE LENGTH (IN/CM)	28.5/72.5	28.5/72.5	28.5/72.5	29.1/73.8	28.5/72.5	29.1/73.8
F FRONT SEAT TUBE LENGTH (IN/CM)	19/48.3	20/50.8	22/55.9	23/58.4	18.5/47	20/50.8
G REAR SEAT TUBE LENGTH (IN/CM)	15.6/39.7	15.6/39.7	17/43.2	19/48.3	15.6/39.7	18/45.7
H HEADTUBE LENGTH (IN/CM)	5.9/15	6.5/16.5	7.1/18	7.9/20	5.1/13	5.9/15
I CHAINSTAY LENGTH (IN/CM)	17.4/44.2	★	★	★	18.9/48	★
J FORK RAKE (IN/CM)	1.8/4.5	★	★	★	1.8/4.5	★
K FRONT BOTTOM BRACKET HEIGHT (IN/CM)	10.8/27.4	★	★	★	11.5/29.2	★
L REAR BOTTOM BRACKET HEIGHT (IN/CM)	10.5/26.7	★	★	★	11.2/28.5	★
M WHEELBASE (IN/CM)	68.6/174.2	68.6/174.2	69.2/175.7	70.6/179.5	71.3/181.2	73/185.5
N TRAIL (IN/CM)	2.8/7.2	2.3/5.9	★	★	2.7/6.9	★
O FRONT STANDOVER AT TOP TUBE MIDPOINT (IN/CM)	28.2/71.5	30.7/77.9	31.7/80.4	32.6/82.7	29.1/74	30.2/76.7
P REAR STANDOVER AT TOP TUBE MIDPOINT (IN/CM)	25.4/64.6	26.3/66.8	27.6/70.2	29.1/74	25.5/64.7	27.3/69.3
Q FRONT BOTTOM BRACKET DROP (IN/CM)	2.9/7.4	★	★	★	3.1/7.8	★
R REAR BOTTOM BRACKET DROP (IN/CM)	3.2/8.1	★	★	★	3.3/8.5	★
S FRONT CENTER DISTANCE (IN/CM)	23.2/59	23.2/58.9	23.8/60.4	24.8/62.9	24.5/62.2	25.7/65.2
T STACK	23.3/59.2	24.2/61.4	24.7/62.8	25.5/64.7		
U REACH	14.1/35.9	14.6/37.2	15.1/38.3	15.8/40.2		

TANDEM 29

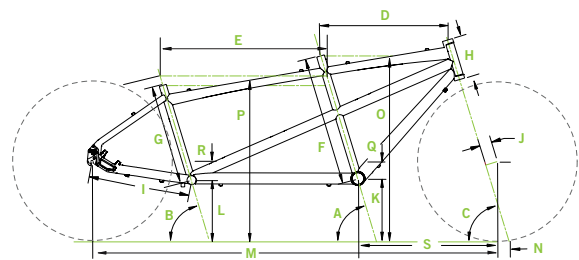


★ INDICATES SAME AS PREVIOUS SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

E-SERIES


MAVARO

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)				
B TOP TUBE HORIZONTAL (CM/IN)				
C TOP TUBE ACTUAL (CM/IN)				
D HEAD TUBE ANGLE				
E SEAT TUBE ANGLE				
F STANDOVER (CM/IN)				
G HEAD TUBE LENGTH (CM/IN)				
H WHEELBASE (CM/IN)				
I FRONT CENTER (CM/IN)				
J CHAIN STAY LENGTH (CM/IN)				
K BOTTOM BRACKET DROP (CM/IN)				
L BOTTOM BRACKET HEIGHT (CM/IN)				
M FORK RAKE (CM/IN)				
N TRAIL (CM/IN)				

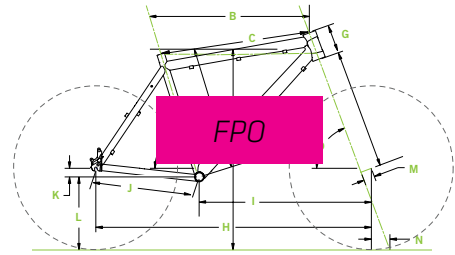


TRAMOUNT

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)				
B TOP TUBE HORIZONTAL (CM/IN)				
C TOP TUBE ACTUAL (CM/IN)				
D HEAD TUBE ANGLE				
E SEAT TUBE ANGLE				
F STANDOVER (CM/IN)				
G HEAD TUBE LENGTH (CM/IN)				
H WHEELBASE (CM/IN)				
I FRONT CENTER (CM/IN)				
J CHAIN STAY LENGTH (CM/IN)				
K BOTTOM BRACKET DROP (CM/IN)				
L BOTTOM BRACKET HEIGHT (CM/IN)				
M FORK RAKE (CM/IN)				
N TRAIL (CM/IN)				

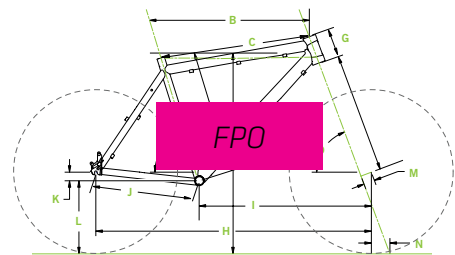


KINNETO

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)				
B TOP TUBE HORIZONTAL (CM/IN)				
C TOP TUBE ACTUAL (CM/IN)				
D HEAD TUBE ANGLE				
E SEAT TUBE ANGLE				
F STANDOVER (CM/IN)				
G HEAD TUBE LENGTH (CM/IN)				
H WHEELBASE (CM/IN)				
I FRONT CENTER (CM/IN)				
J CHAIN STAY LENGTH (CM/IN)				
K BOTTOM BRACKET DROP (CM/IN)				
L BOTTOM BRACKET HEIGHT (CM/IN)				
M FORK RAKE (CM/IN)				
N TRAIL (CM/IN)				

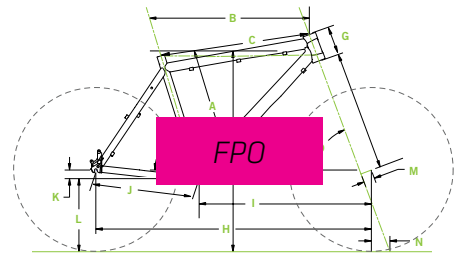

CONTRO E-BIKE

SPECIFICATIONS	SM	MD	LG	XL
A SEAT TUBE LENGTH (CM/IN)				
B TOP TUBE HORIZONTAL (CM/IN)				
C TOP TUBE ACTUAL (CM/IN)				
D HEAD TUBE ANGLE				
E SEAT TUBE ANGLE				
F STANDOVER (CM/IN)				
G HEAD TUBE LENGTH (CM/IN)				
H WHEELBASE (CM/IN)				
I FRONT CENTER (CM/IN)				
J CHAIN STAY LENGTH (CM/IN)				
K BOTTOM BRACKET DROP (CM/IN)				
L BOTTOM BRACKET HEIGHT (CM/IN)				
M FORK RAKE (CM/IN)				
N TRAIL (CM/IN)				

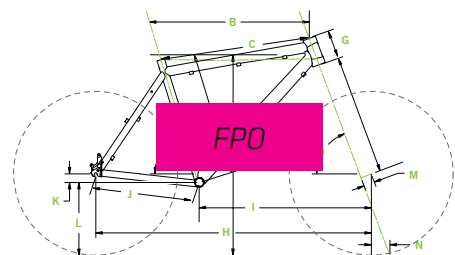

ROAD – WOMEN'S


SUPERSIX EVO WOMEN'S

SPECIFICATIONS	44	48	51	54	56
A HORIZONTAL TOP TUBE LENGTH (CM)	49.4	50.9	52.3	53.9	55.3
B MEASURED SEAT TUBE LENGTH (CM)*	40.0	43.0	46.0	47.0	50.0
C SEAT TUBE ANGLE	75.0°	74.6°	74.2°	73.8°	73.4°
D HEAD TUBE ANGLE	70.0°	70.8°	71.5°	72.2°	72.9°
E CHAINSTAY LENGTH (CM)	40.5	★	★	★	★
F FORK RAKE (CM)	5.0	★	★	4.5	★
G BOTTOM BRACKET HEIGHT (CM)	26.5	★	★	26.8	★
H WHEELBASE (CM)	96.7	★	★	97.9	98.4
I TRAIL (CM)	7.0	★	★	6.2	5.8
J STANDOVER AT TOP TUBE MIDPOINT (CM)	70.5	72.8	75.0	77.0	78.8
K BOTTOM BRACKET DROP (CM)	7.2	★	★	6.9	★
L FRONT CENTER DISTANCE (CM)	56.9	57.4	58	★	58.5
M HEAD TUBE LENGTH (CM)	10.5	11.2	13.4	15.0	16.5
N STACK (CM)	50.1	51.8	53.5	55.2	56.9
O REACH (CM)	36.0	36.6	37.2	37.8	38.4

* THE MEASURED SIZE IS FROM THE CENTER OF THE BOTTOM BRACKET TO THE TOP OF THE TOP TUBE, MEASURED ALONG THE SEAT TUBE AXIS.
ALL SIZES HAVE A SLIGHTLY SLOPING TOP TUBE.


CAAD10 WOMEN'S

SPECIFICATIONS	44	48	51	54	56
A HORIZONTAL TOP TUBE LENGTH (CM)	49.4	50.9	52.3	53.8	55.4
B MEASURED SEAT TUBE LENGTH (CM)*	43.4	46.4	49.3	51.4	53.4
C SEAT TUBE ANGLE	75.0°	74.5°	74.0°	73.5°	*
D HEAD TUBE ANGLE	70.0°	71.0°	71.5°	72.0°	73.0°
E CHAINSTAY LENGTH (CM)	40.5	★	★	★	★
F FORK RAKE (CM)	5.0	★	★	4.5	★
G BOTTOM BRACKET HEIGHT (CM)	28.0	★	★	★	★
H WHEELBASE (CM)	96.9	97.1	50.6	97.8	98.4
I TRAIL (CM)	7.4	6.7	6.4	6.6	6
J STANDOVER AT TOP TUBE MIDPOINT (CM)	72.2	74.5	76.7	78.4	80.3
K BOTTOM BRACKET DROP (CM)	7.0	★	★	★	★
L FRONT CENTER DISTANCE (CM)	57.4	57.7	12.8	58.3	58.9
M HEAD TUBE LENGTH (CM)	10.4	11.9	13.4	15.0	16.5
N STACK (CM)	50.0	51.8	53.4	55.3	57.1
O REACH (CM)	36.0	36.5	37.0	37.5	38.5

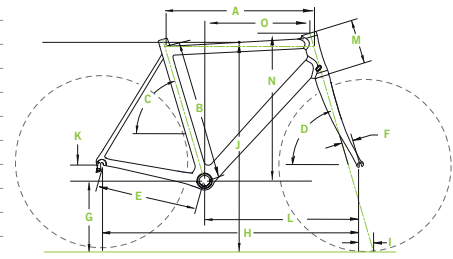

SLICE WOMEN'S

SPECIFICATIONS	44	48	51	54
A HORIZONTAL TOP TUBE (CM)	45.0	47.0	48.9	50.7
B MEASURED SEAT TUBE LENGTH (CM)	46	48.6	50.3	52.4
C SEAT TUBE ANGLE*	79°	★	★	★
D HEAD TUBE ANGLE	71.2°	★	★	71.5°
E CHAIN STAY LENGTH (CM)	38.0	40.5	★	★
F FORK RAKE (CM/IN)	3.5	4.5	★	★
G BOTTOM BRACKET HEIGHT (CM)	25.9	26.2	★	★
H WHEELBASE (CM)	91.3	96.0	98.1	100.0
I TRAIL (CM)	6.9	6.8	6.8	6.6
J STANDOVER AT TOP TUBE MIDPOINT (CM)	71.1	73.9	75.6	77.7
K BOTTOM BRACKET DROP (CM)	5.3	7.7	★	★
L FRONT CENTER (CM)	53.7	56.3	58.3	60.2
M HEAD TUBE LENGTH (CM)	10.0	8.0	9.8	11.8
N STACK (CM)	46.5	48.7	50.7	52.7
O REACH (CM)	36.0	37.5	39.0	40.5

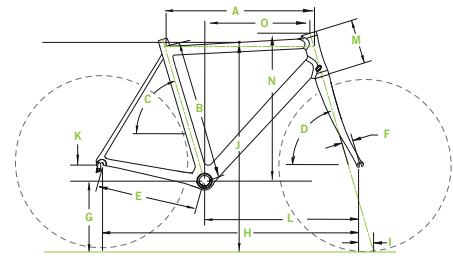


SYNAPSE CARBON WOMEN'S

SPECIFICATIONS	44	48	51	54	56
A HORIZONTAL TOP TUBE LENGTH (CM)	49.1	50.6	52.1	53.6	55.1
B MEASURED SEAT TUBE LENGTH (CM)*	38.0	40.5	43.0	46.0	49.0
C SEAT TUBE ANGLE	75.3°	74.9°	74.5°	74.1°	73.7°
D HEAD TUBE ANGLE	69.7°	70.6°	71.3°	72.0°	72.7°
E CHAINSTAY LENGTH (CM)	41.0	★	★	★	★
F FORK RAKE (CM)	5.5	★	★	5.0	★
G BOTTOM BRACKET HEIGHT (CM)	26.5	★	★	26.8	★
H WHEELBASE (CM)	98.1	98.5	99.0	99.1	99.5
I TRAIL (CM)	6.7	6.1	5.7	5.8	5.4
J STANDOVER AT TOP TUBE MIDPOINT (CM)	64.5	67.0	69.5	72.8	75.8
K BOTTOM BRACKET DROP (CM)	7.5	★	★	7.3	★
L FRONT CENTER DISTANCE (CM)	58.3	58.6	59.2	★	59.6
M HEAD TUBE LENGTH (CM)	12.0	13.4	14.9	16.5	18.0
N STACK (CM)	51.6	53.3	55.0	56.7	58.4
O REACH (CM)	35.6	36.2	36.8	37.4	38.0

SYNAPSE ALLOY WOMEN'S/ SYNAPSE DISC ALLOY WOMEN'S

SPECIFICATIONS	44	48	51	54	56
A HORIZONTAL TOP TUBE LENGTH (CM)	49.1	50.6	52.1	53.6	55.1
B MEASURED SEAT TUBE LENGTH (CM)*	38.0	40.5	43.0	46.0	49.0
C SEAT TUBE ANGLE	75.3°	74.9°	74.5°	74.1°	73.7°
D HEAD TUBE ANGLE	69.7°	70.6°	71.3°	72.0°	72.7°
E CHAINSTAY LENGTH (CM)	41.0	★	★	★	★
F FORK RAKE (CM)	5.0	★	★	★	★
G BOTTOM BRACKET HEIGHT (CM)	26.5	★	★	26.8	★
H WHEELBASE (CM)	97.7	98.0	98.5	99.1	99.5
I TRAIL (CM)	7.2	6.7	6.2	5.8	5.4
J STANDOVER AT TOP TUBE MIDPOINT (CM)	68.3	70.6	72.9	75.7	78.2
K BOTTOM BRACKET DROP (CM)	7.5	★	★	7.3	★
L FRONT CENTER DISTANCE (CM)	57.8	58.2	58.7	59.2	59.6
M HEAD TUBE LENGTH (CM)	12.0	13.4	14.9	16.5	18
N STACK (CM)	52.7	54.3	56.0	57.5	59.2
O REACH (CM)	35.3	35.9	36.5	37.2	37.8

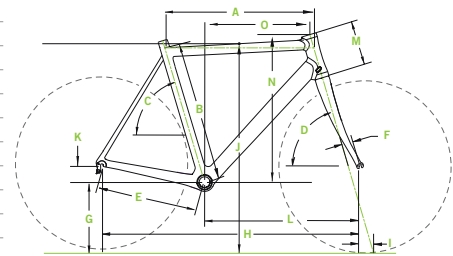


★ INDICATES SAME AS PREVIOUS SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

MOUNTAIN – WOMEN'S

LEXI

SPECIFICATIONS	PE	SM	MD
A SEAT TUBE LENGTH (CM/IN)	40.6/16.0	43.2/17.0	45.7/18.0
B TOP TUBE HORIZONTAL (CM/IN)	53.0/20.9	56.0/22.0	57.5/22.6
C TOP TUBE ACTUAL (CM/IN)	50.8/20.0	53.5/21.1	55.0/21.7
D HEAD TUBE ANGLE	68.5°	69.0°	★
E SEAT TUBE ANGLE EFFECTIVE	73.0°	★	★
E' SEAT TUBE ANGLE ACTUAL	73.0°	★	★
F STANDOVER* (CM/IN)	72.9/28.7	73.1/28.8	75.9/29.9
G HEAD TUBE LENGTH (CM/IN)	13.4/5.3	★	★
H WHEELBASE (CM/IN)	105.2/41.4	107.6/42.4	109.1/43.0
I FRONT CENTER (CM/IN)	62.8/24.7	65.2/25.7	66.7/26.2
J CHAIN STAY LENGTH (CM/IN)	42.5/16.7	★	★
K BOTTOM BRACKET DROP (CM/IN)	0.2/0.1	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	32.8/12.9	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★
N TRAIL (CM/IN)	8.2/3.2	7.8/3.1	★
O STACK (CM/IN)	56.6/22.3	56.8/22.4	★
P REACH (CM/IN)	35.7/14.1	38.6/15.2	40.1/15.8

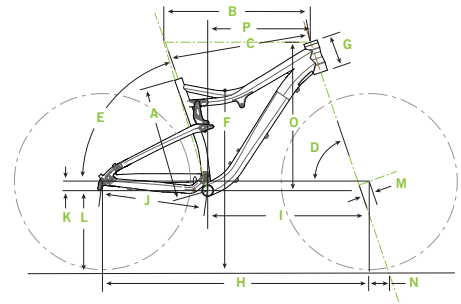


TANGO SL 29

SPECIFICATIONS	SM	MD	TL
A SEAT TUBE LENGTH (CM/IN)	35.0/13.8	41.5/16.3	45.0/17.7
B TOP TUBE HORIZONTAL (CM/IN)	52.2/20.6	57.0/22.4	58.9/23.2
C TOP TUBE ACTUAL (CM/IN)	54.4/21.4	58.2/22.9	60.0/23.6
D HEAD TUBE ANGLE	70.5°	71.0°	★
E SEAT TUBE ANGLE	73.5°	★	73.0°
F STANDOVER* (CM/IN)	68.0/26.8	68.7/27.0	71.6/28.2
G HEAD TUBE LENGTH (CM/IN)	9.0/3.5	10.2/4.0	11.4/4.5
H WHEELBASE (CM/IN)	104.8/41.3	106.4/41.9	107.8/42.4
I FRONT CENTER (CM/IN)	61.3/24.1	62.8/24.7	64.3/25.3
J CHAIN STAY LENGTH (CM/IN)	44.4/17.5	★	★
K BOTTOM BRACKET DROP (CM/IN)	6.5/2.6	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	30.5/12.0	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★
N TRAIL (CM/IN)	8.3/3.3	8.0/3.1	★
O STACK (CM/IN)	59.6/23.5	61.0/24.0	62.2/24.5
P REACH (CM/IN)	37.3/14.7	38.9/15.3	40.0/15.7

TANGO


SPECIFICATIONS	SM	MD	TL
A SEAT TUBE LENGTH (CM/IN)	35.0/13.8	40.0/15.7	45.0/17.7
B TOP TUBE HORIZONTAL (CM/IN)	54.5/21.5	57.0/22.4	59.5/23.4
C TOP TUBE ACTUAL (CM/IN)	53.1/20.9	54.9/21.6	57.1/22.5
D HEAD TUBE ANGLE	70.0°	★	★
E SEAT TUBE ANGLE	73.5°	★	★
F STANDOVER* (CM/IN)	35.2/13.8	38.8/15.3	41.1/16.2
G HEAD TUBE LENGTH (CM/IN)	9.0/3.5	10.3/4.1	11.5/4.5
H WHEELBASE (CM/IN)	104.9/41.3	107.5/42.3	110.1/43.3
I FRONT CENTER (CM/IN)	61.8/24.3	64.4/25.3	66.9/26.3
J CHAIN STAY LENGTH (CM/IN)	43.5/17.1	★	★
K BOTTOM BRACKET DROP (CM/IN)	4.3/1.7	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	31.4/12.4	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★
N TRAIL (CM/IN)	8.2/3.2	★	★
O STACK (CM/IN)	57.6/22.7	58.9/23.2	60.0/23.6
P REACH (CM/IN)	37.4/14.7	39.6/15.6	41.7/16.4

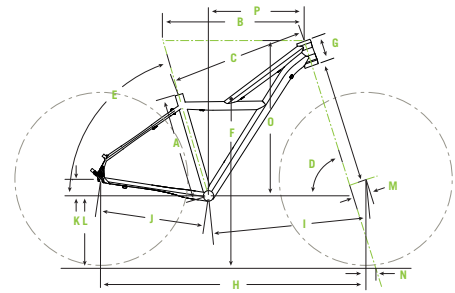

MOUNTAIN – WOMEN'S

LEXI

SPECIFICATIONS	PE	SM	MD
A SEAT TUBE LENGTH (CM/IN)	40.6/16.0	43.2/17.0	45.7/18.0
B TOP TUBE HORIZONTAL (CM/IN)	53.0/20.9	56.0/22.0	57.5/22.6
C TOP TUBE ACTUAL (CM/IN)	50.8/20.0	53.5/21.1	55.0/21.7
D HEAD TUBE ANGLE	68.5°	69.0°	★
E SEAT TUBE ANGLE EFFECTIVE	73.0°	★	★
E' SEAT TUBE ANGLE ACTUAL	73.0°	★	★
F STANDOVER* (CM/IN)	72.9/28.7	73.1/28.8	75.9/29.9
G HEAD TUBE LENGTH (CM/IN)	13.4/5.3	★	★
H WHEELBASE (CM/IN)	105.2/41.4	107.6/42.4	109.1/43.0
I FRONT CENTER (CM/IN)	62.8/24.7	65.2/25.7	66.7/26.2
J CHAIN STAY LENGTH (CM/IN)	42.5/16.7	★	★
K BOTTOM BRACKET DROP (CM/IN)	0.2/0.1	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	32.8/12.9	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★
N TRAIL (CM/IN)	8.2/3.2	7.8/3.1	★
O STACK (CM/IN)	56.6/22.3	56.8/22.4	★
P REACH (CM/IN)	35.7/14.1	38.6/15.2	40.1/15.8

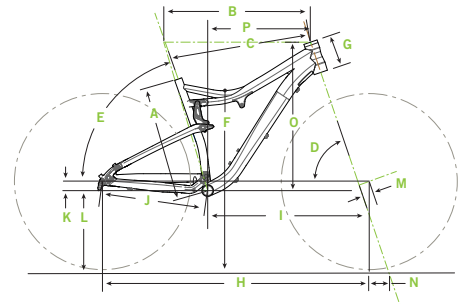


TRAIL SL 29

SPECIFICATIONS	SM	MD	TL
A SEAT TUBE LENGTH (CM/IN)	35.0/13.8	41.5/16.3	45.0/17.7
B TOP TUBE HORIZONTAL (CM/IN)	52.2/20.6	57.0/22.4	58.9/23.2
C TOP TUBE ACTUAL (CM/IN)	54.4/21.4	58.2/22.9	60.0/23.6
D HEAD TUBE ANGLE	70.5°	71.0°	★
E SEAT TUBE ANGLE	73.5°	★	73.0°
F STANDOVER* (CM/IN)	68.0/26.8	68.7/27.0	71.6/28.2
G HEAD TUBE LENGTH (CM/IN)	9.0/3.5	10.2/4.0	11.4/4.5
H WHEELBASE (CM/IN)	104.8/41.3	106.4/41.9	107.8/42.4
I FRONT CENTER (CM/IN)	61.3/24.1	62.8/24.7	64.3/25.3
J CHAIN STAY LENGTH (CM/IN)	44.4/17.5	★	★
K BOTTOM BRACKET DROP (CM/IN)	6.5/2.6	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	30.5/12.0	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★
N TRAIL (CM/IN)	8.3/3.3	8.0/3.1	★
O STACK (CM/IN)	59.6/23.5	61.0/24.0	62.2/24.5
P REACH (CM/IN)	37.3/14.7	38.9/15.3	40.0/15.7

TRAIL

SPECIFICATIONS	SM	MD	TL
A SEAT TUBE LENGTH (CM/IN)	35.0/13.8	40.0/15.7	45.0/17.7
B TOP TUBE HORIZONTAL (CM/IN)	54.5/21.5	57.0/22.4	59.5/23.4
C TOP TUBE ACTUAL (CM/IN)	53.1/20.9	54.9/21.6	57.1/22.5
D HEAD TUBE ANGLE	70.0°	★	★
E SEAT TUBE ANGLE	73.5°	★	★
F STANDOVER* (CM/IN)	35.2/13.8	38.8/15.3	41.1/16.2
G HEAD TUBE LENGTH (CM/IN)	9.0/3.5	10.3/4.1	11.5/4.5
H WHEELBASE (CM/IN)	104.9/41.3	107.5/42.3	110.1/43.3
I FRONT CENTER (CM/IN)	61.8/24.3	64.4/25.3	66.9/26.3
J CHAIN STAY LENGTH (CM/IN)	43.5/17.1	★	★
K BOTTOM BRACKET DROP (CM/IN)	4.3/1.7	★	★
L BOTTOM BRACKET HEIGHT (CM/IN)	31.4/12.4	★	★
M FORK RAKE (CM/IN)	4.5/1.8	★	★
N TRAIL (CM/IN)	8.2/3.2	★	★
O STACK (CM/IN)	57.6/22.7	58.9/23.2	60.0/23.6
P REACH (CM/IN)	37.4/14.7	39.6/15.6	41.7/16.4

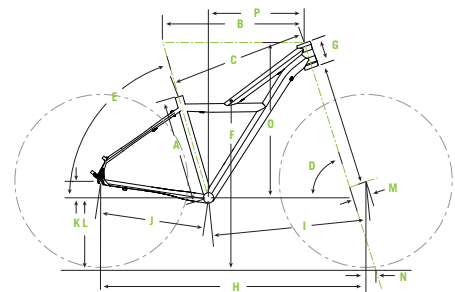

★ INDICATES SAME AS PREVIOUS SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


FITNESS – WOMEN'S

QUICK SPEED WOMEN'S

SPECIFICATIONS	SM	MD	TL
A SEAT TUBE LENGTH (CM/IN)	41.0/16.1	46.0/18.1	51.0/20.1
B TOP TUBE HORIZONTAL (CM/IN)	56.0/22.0	57.5/22.6	60.5/23.8
C TOP TUBE ACTUAL (CM/IN)	51.3/20.2	52.5/20.7	55.0/21.7
D HEAD TUBE ANGLE	70.5	71.0	71.5
E SEAT TUBE ANGLE	75.0	74.5	73.0
F STANDOVER AT TOP TUBE MIDPOINT (CM)	71.8	75.5	79.1
G HEAD TUBE LENGTH (CM)	14.0	16.0	19.0
H WHEELBASE (CM/IN)	106.7	107.3	108.2
I FRONT CENTER (CM)	64.1	64.7	65.6
J CHAIN STAY LENGTH (CM)	43.5	★	★
K BOTTOM BRACKET DROP (CM)	7.0	★	★
L BOTTOM BRACKET HEIGHT (CM)	27.4	★	★
M FORK RAKE (CM)	5.0	★	★
N TRAIL (CM)	6.9	6.6	6.2
O STACK (CM/IN)			
P REACH (CM/IN)			


QUICK WOMEN'S

SM	MD	TL
36.0/14.2	42.0/16.5	47.0/18.5
53.0/20.9	54.5/21.5	56.5/22.2
52.1/20.5	53.0/20.9	54.6/21.5
70.0°	70.5°	71.0°
75.0°	★	74.5°
68.3/26.9	73.0/28.7	77.0/30.3
12.5/4.9	15.0/5.9	18.0/7.1
103.4/40.7	104.7/41.2	105.8/41.7
60.9/24.0	62.1/24.4	63.3/24.9
43.5/17.1	★	★
7.0/2.8	★	★
27.4/10.8	★	★
4.5/1.8	★	★
7.7/3.0	★	★
54.6/21.5	57.2/22.5	60.2/23.7
38.4/15.1	39.2/15.4	39.8/15.7

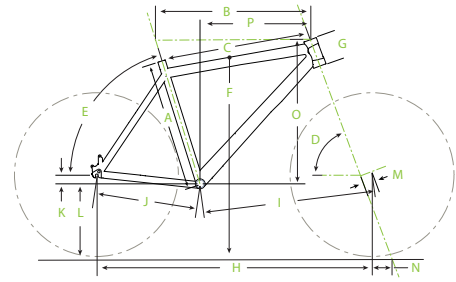


ALTHEA

SPECIFICATIONS	SM	MD	TL
A SEAT TUBE LENGTH (CM/IN)	37.0/14.6	41.5/16.3	46.0/18.1
B TOP TUBE HORIZONTAL (CM/IN)	53.0/20.9	55.0/21.7	57.5/22.6
C TOP TUBE ACTUAL (CM/IN)	53.1/20.9	54.1	55.7/21.3
D HEAD TUBE ANGLE	69.0°	★	70.0°
E SEAT TUBE ANGLE	74.0°	★	73.5°
F STANDOVER HEADSHOCK (CM/IN)	69.2/27.2	71.6/28.2	74.0/29.1
F STANDOVER SUSPENSION (CM/IN)	69.1/27.2	72.3/28.5	75.7/29.8
G HEAD TUBE LENGTH HEADSHOCK (CM/IN)	11.4/4.5	11.4/4.5	11.4/4.5
G HEAD TUBE LENGTH SUSPENSION (CM/IN)	12.0/4.7	14.0/5.5	16.0/6.3
H WHEELBASE (CM/IN)	107.1/42.2	106.4/41.8	107.3/42.2
J CHAIN STAY LENGTH (CM/IN)	45.0/17.7	★	★
K BOTTOM BRACKET DROP (CM)	6.7	★	★
L BOTTOM BRACKET HEIGHT (CM)	33.2	★	★
M FORK RAKE (CM)	4.5	★	★
N TRAIL (CM)	8.7	★	8.1
O STACK HEADSHOCK (CM/IN)	60.4/23.8	60.4/23.8	60.8/23.9
P STACK SUSPENSION (CM/IN)	60.4/23.8	62.2/24.5	64.5/25.4
O REACH HEADSHOCK (CM/IN)	35.7/14	37.7/14.8	39.5/15.5
P REACH SUSPENSION (CM/IN)	35.7/14.1	37.2/14.6	38.4/15.1

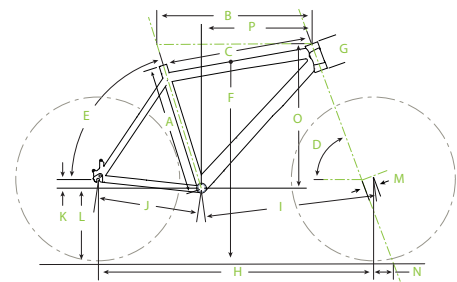


FELICITY

SPECIFICATIONS	SM	TL
A SEAT TUBE LENGTH (CM/IN)	48.0/18.9	53.0/20.9
B TOP TUBE HORIZONTAL (CM/IN)	54.5/21.5	56.0/22.0
C TOP TUBE ACTUAL (CM/IN)	N/A	N/A
D HEAD TUBE ANGLE	69.0°	70.0°
E SEAT TUBE ANGLE	74.0°	73.5°
F STANDOVER AT TOP TUBE MIDPOINT (CM/IN)	N/A	N/A
G HEAD TUBE LENGTH (CM/IN)	15.0/5.9	16.0/6.3
H WHEELBASE (CM/IN)	106.8/42.0	106.3/41.9
I FRONT CENTER (CM/IN)	62.7/24.7	62.1/24.4
J CHAIN STAY LENGTH (CM)	45.0/17.7	★
K BOTTOM BRACKET DROP (CM)	6.7/2.6	★
L BOTTOM BRACKET HEIGHT (CM)	33.2/13.0	★
M FORK RAKE (CM)	4.5	★
N TRAIL (CM)	8.7	8.1
O STACK (CM/IN)	57.6/22.7	58.9/23.2
P REACH (CM/IN)	38.0/15.0	★

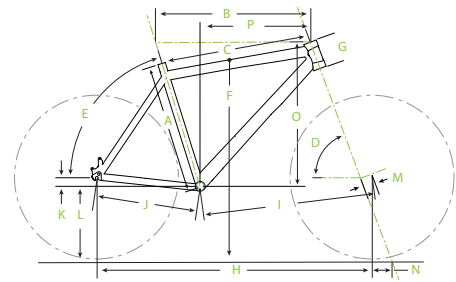

ADVENTURE WOMEN'S

SPECIFICATIONS	SM	TL
A SEAT TUBE LENGTH (CM/IN)	36.8/14.5	45.7/18.0
B TOP TUBE HORIZONTAL (CM/IN)	55.5/21.9	56.5/22.2
C TOP TUBE ACTUAL (CM/IN)	N/A	N/A
D HEAD TUBE ANGLE	69.0°	★
E SEAT TUBE ANGLE EFFECTIVE	70.0°	★
F STANDOVER AT TOP TUBE MIDPOINT (CM/IN)	70.0/27.6	73.2/28.8
G HEAD TUBE LENGTH (CM/IN)	13.6/5.4	15.6/6.1
H WHEELBASE (CM/IN)	104.9/41.3	105.9/41.7
I FRONT CENTER (CM/IN)	59.2/23.3	60.3/23.7
J CHAIN STAY LENGTH (CM/IN)	46.5/18.3	★
K BOTTOM BRACKET DROP (CM/IN)	6.8/2.7	★
L BOTTOM BRACKET HEIGHT (CM/IN)	28.0/11.0	★
M FORK RAKE (CM/IN)	4.5/1.8	★
N TRAIL (CM/IN)	8.5/3.4	★
O STACK (CM/IN)	57.6/22.7	59.4/23.4
P REACH (CM/IN)	34.5/13.6	34.9/13.7

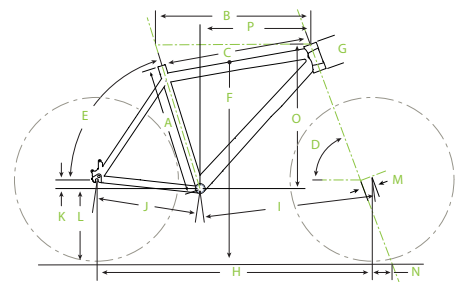

★ INDICATES SAME AS PREVIOUS SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


KID'S

RACE 24

SPECIFICATIONS	MD	LG
A SEAT TUBE LENGTH (CM/IN)	31.0/12.2	34.0/13.4
B TOP TUBE HORIZONTAL (CM/IN)	50.0/19.7	53.0/20.9
C TOP TUBE ACTUAL (CM/IN)	48.9/19.3	50.7/20.0
D HEAD TUBE ANGLE	70.0°	★
E SEAT TUBE ANGLE	72.0°	★
F STANDOVER (CM/IN)	58.0/22.8	61.0/24.0
G HEAD TUBE LENGTH (CM/IN)	10.0/3.9	11.0/4.3
H WHEELBASE (CM/IN)	96.4/38.0	99.7/39.3
I FRONT CENTER (CM/IN)	54.8/21.6	58.0/22.8
J CHAIN STAY LENGTH (CM/IN)	42.0/16.5	★
K BOTTOM BRACKET DROP (CM/IN)	4.5/1.8	4.0/1.6
L BOTTOM BRACKET HEIGHT (CM/IN)	26.3/10.4	26.8/10.6
M FORK RAKE (CM/IN)	4.0/1.6	★

TRAIL 24 / STREET 24

(ONE SIZE) OS
31.0/12.2
50.0/19.7
48.9/19.3
70.0°
72.0°
58.0/22.8
10.0/3.9
96.4/38.0
54.8/21.6
42.0/16.5
4.5/1.8
26.3/10.4
4.0/1.6

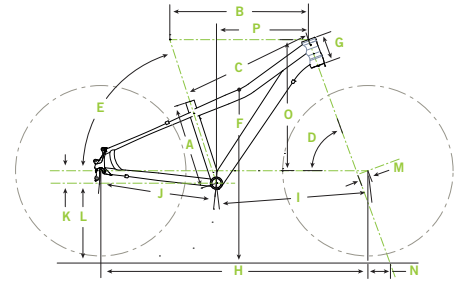

TRAIL 20 / STREET 20

SPECIFICATIONS	(ONE SIZE) OS
A SEAT TUBE LENGTH (CM/IN)	28.0/11.0
B TOP TUBE HORIZONTAL (CM/IN)	46.5/18.3
C TOP TUBE ACTUAL (CM/IN)	44.3/17.4
D HEAD TUBE ANGLE	70.0°
E SEAT TUBE ANGLE	72.0°
F STANDOVER (CM/IN)	50.0/19.7
G HEAD TUBE LENGTH (CM/IN)	10.0/3.9
H WHEELBASE (CM/IN)	89.9/35.4
I FRONT CENTER (CM/IN)	51.5/20.3
J CHAIN STAY LENGTH (CM/IN)	38.5/15.2
K BOTTOM BRACKET DROP (CM/IN)	2.2/0.9
L BOTTOM BRACKET HEIGHT (CM/IN)	23.5/9.3
M FORK RAKE (CM/IN)	4.0/1.6

TRAIL 20 SINGLE-SPEED

(ONE SIZE) OS
24.0/9.4
44.0/17.3
43.3/17.0
70.0°
72.0°
44.0/17.3
10.0/3.9
88.6/34.9
50.3/19.8
38.5/15.2
3.2/1.3
22.5/8.9
4.0/1.6

TRAIL 16 SINGLE-SPEED

(ONE SIZE) OS
21.0/8.3
38.4/15.1
37.1/14.6
70.0°
74.0°
39.0/15.4
8.0/3.1
74.6/29.4
43.6/17.2
31.0/12.2
-0.7/-0.3
21.4/8.4
2.5/1.0

